

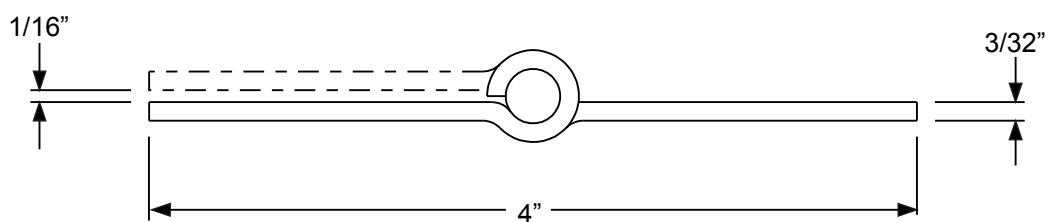



ANSI Standard Template Pattern Hinge - Undersize Steel Edge Door	10.3
Standard Self-Aligning Hinge	10.4
Standard Self-Aligning Hinge with Security Tab	10.5
Adjustable Hinge	10.6
UL Listed Spring Hinge	10.7
ANSI Standard Template Pattern UL Listed Spring Hinge - Steel Edge Door	10.8
Ball Bearing Hinge	10.9
Self Aligning NRP (Riveted) Pin Hinge	10.10
Classic-Craft Ball Bearing Hinge	10.11
Strike Plates	10.12
French Inswing Multi-Point Lock Shootbolt System Strike Plates	10.13
Lever Style Multi-Point Lock Tongue System Strike Plates	10.15
Grip Style Multi-Point Lock Tongue System Strike Plates	10.16
Vented Sidelite Multi-Point Lock Tongue System Strike Plates	10.17
Lever Style Multi-Point Lock - Gears & Extensions	10.18
Grip Style Multi-Point Lock - Gears & Extensions	10.21
Vented Sidelite Multi-Point Lock - Gears & Extensions	10.22
Lever Style Multi-Point Lock - Handle / Trim	10.23
Grip Style Multi-Point Lock - Handle / Trim	10.25
Vented Sidelite Multi-Point Lock - Handle / Trim	10.26
Lever Style 45mm Multi-Point Lock - Handle / Trim	10.27
Lever Style 60mm Multi-Point Lock - Handle / Trim	10.28
Grip Style 60mm Multi-Point Lock - Handle / Trim	10.29
Rustic Hardware	10.30
Rain Deflector (Inswing) / Rain Guard (Outswing)	10.31

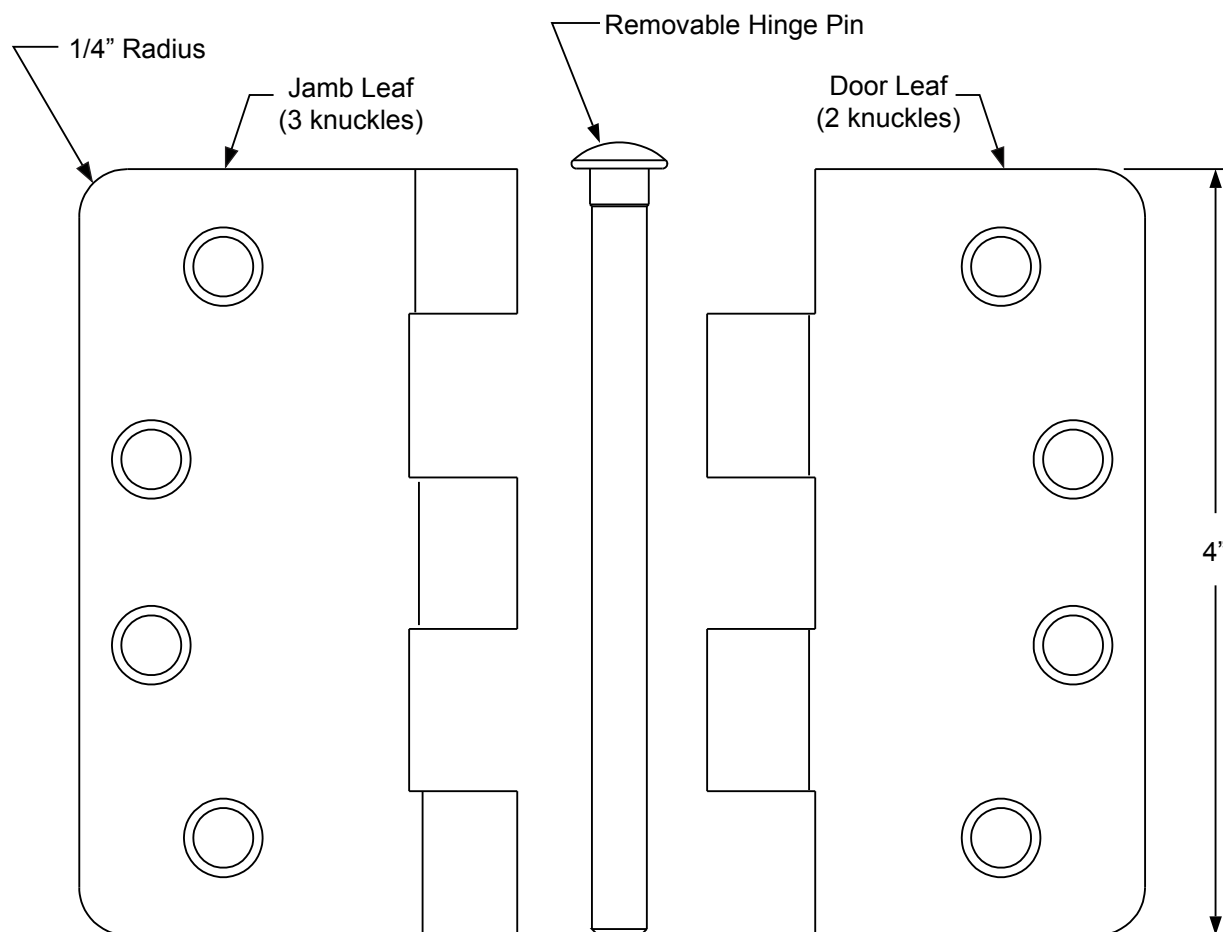

*NOTE: 1/32" swage with
5/8" corner radius recommended
when using a Steel Edge door
with a wood frame.




Jamb
#10 x 3/4" Phillips
Flat Head Screw






#12-24 x 1/2"
with #10 Head
Machine Screw


Hardware

Standard Self-Aligning Hinge



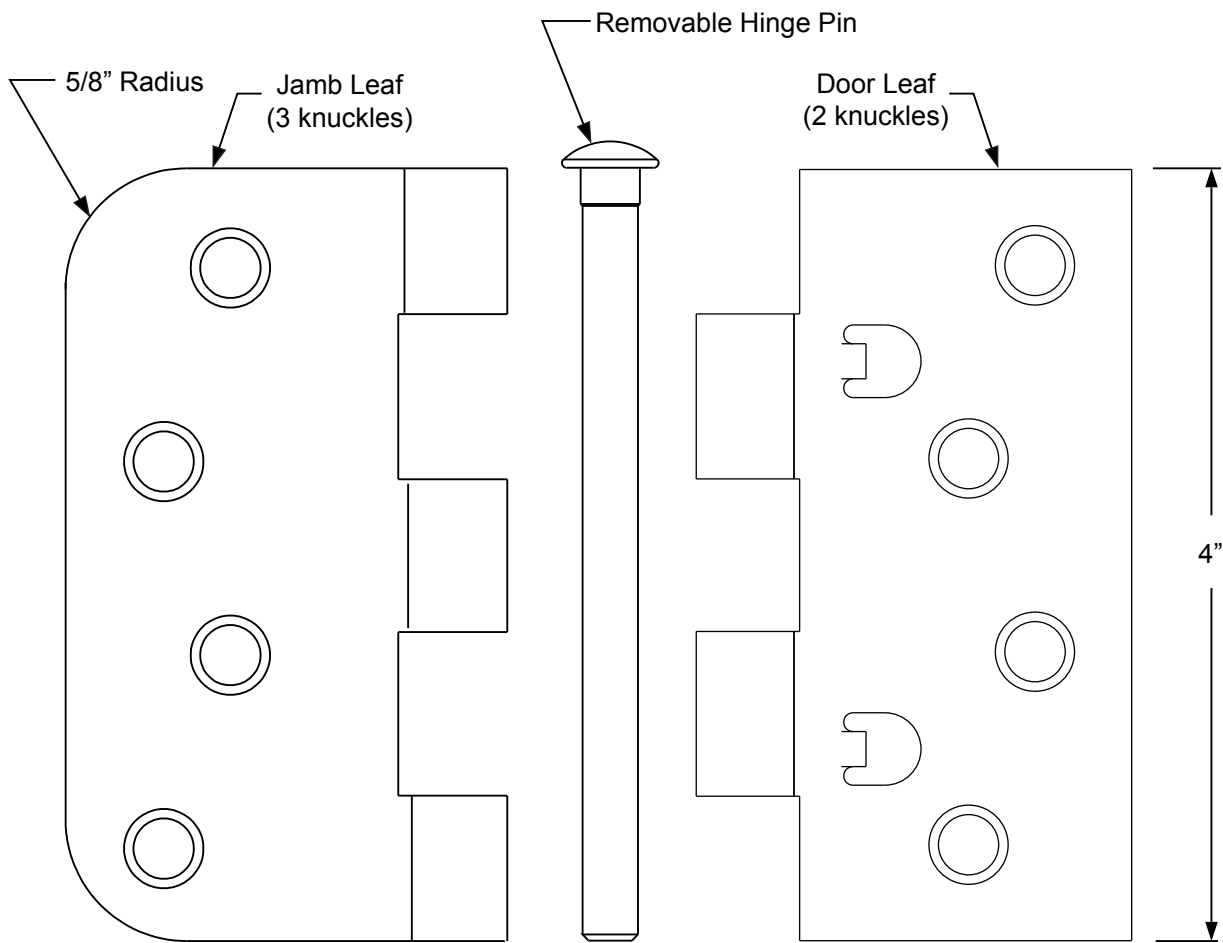


Hardware


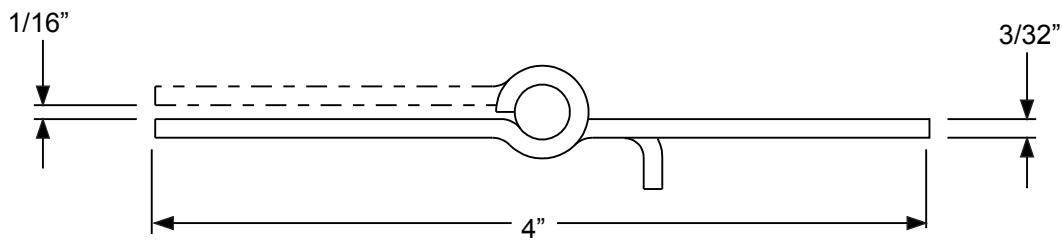


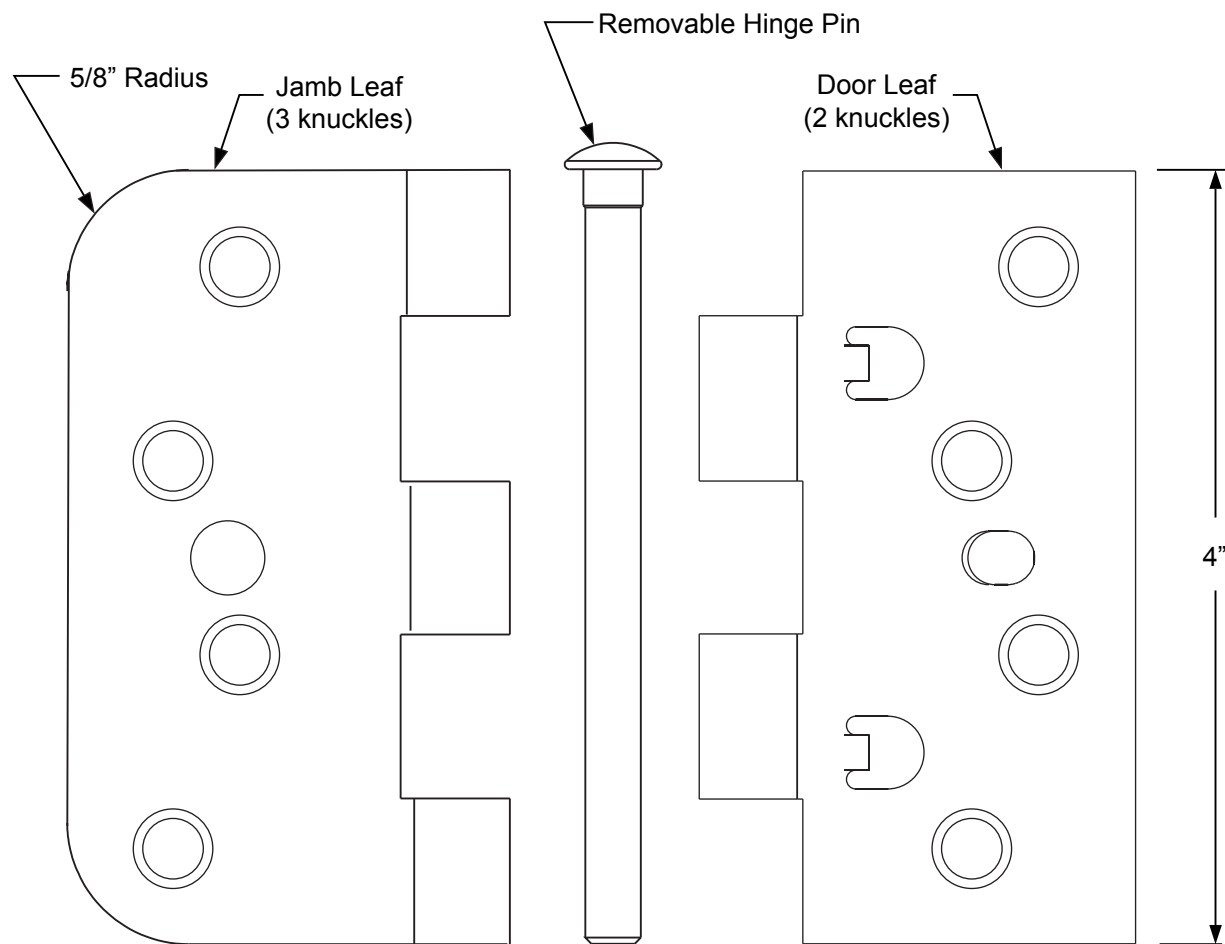

Hardware

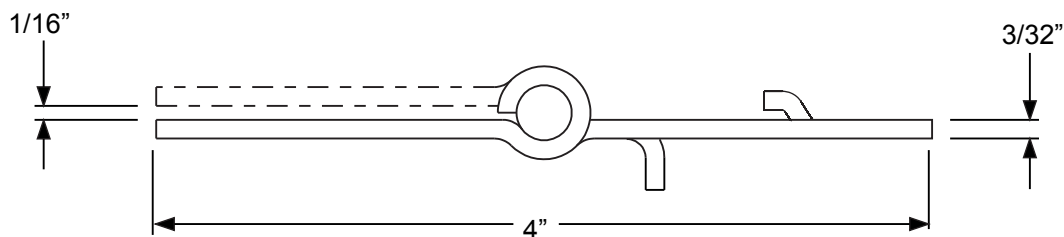


Adjustable Hinge

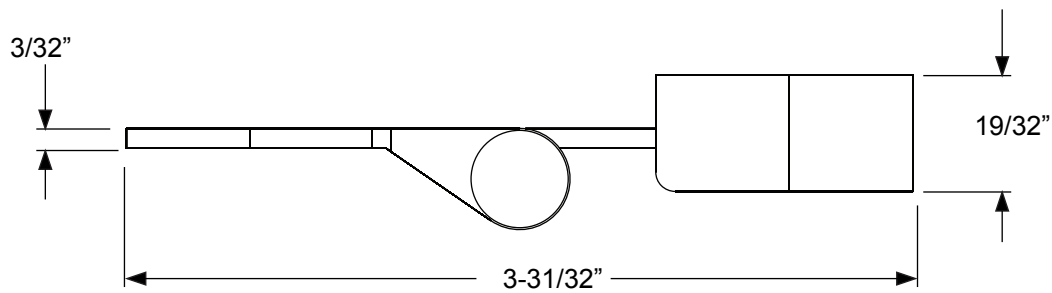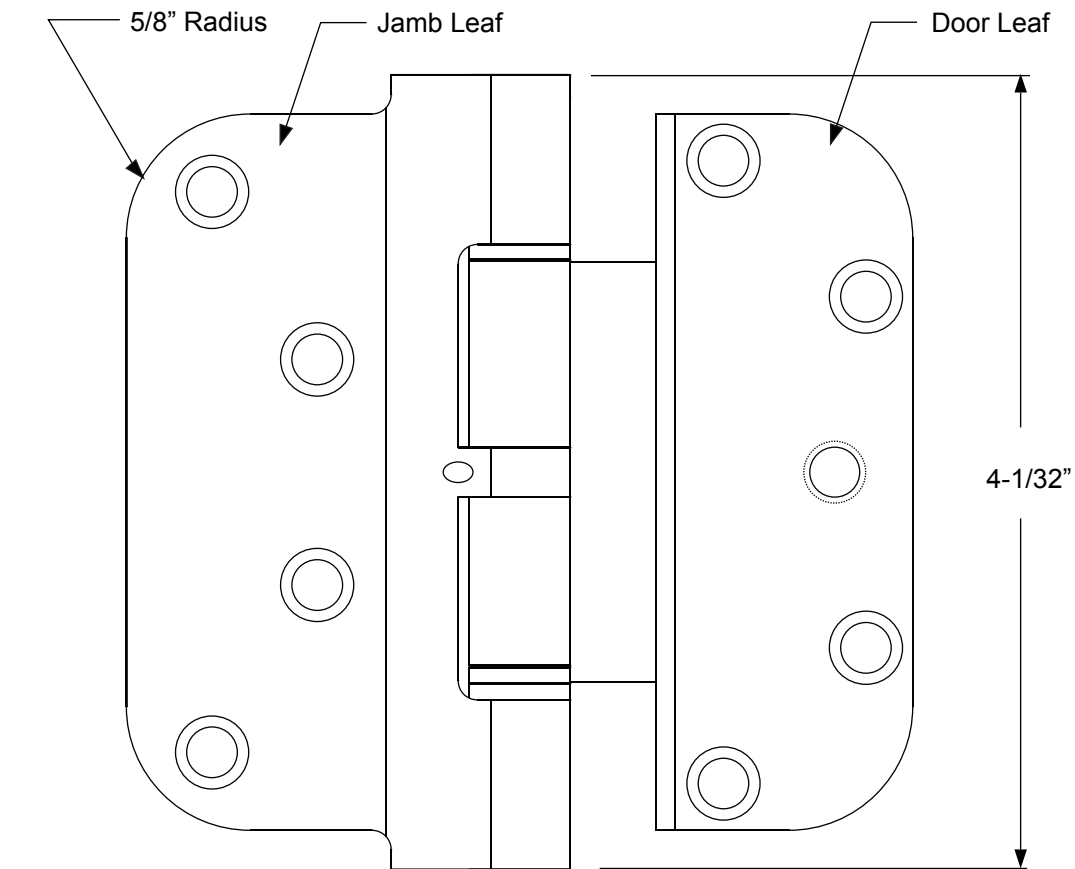


Jamb Leaf
#10 x 3/4" Phillips
Flat Head Screw

Door Leaf
#8 x 1-1/4" Phillips
Flat Head Screw




Jamb Leaf
#10 x 2-1/2" Phillips
Flat Head Screw

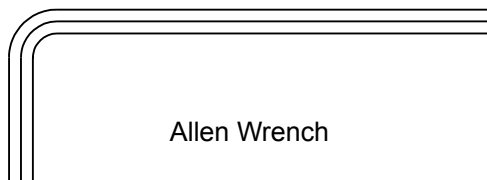

Screws and Allen Wrench are sold separately


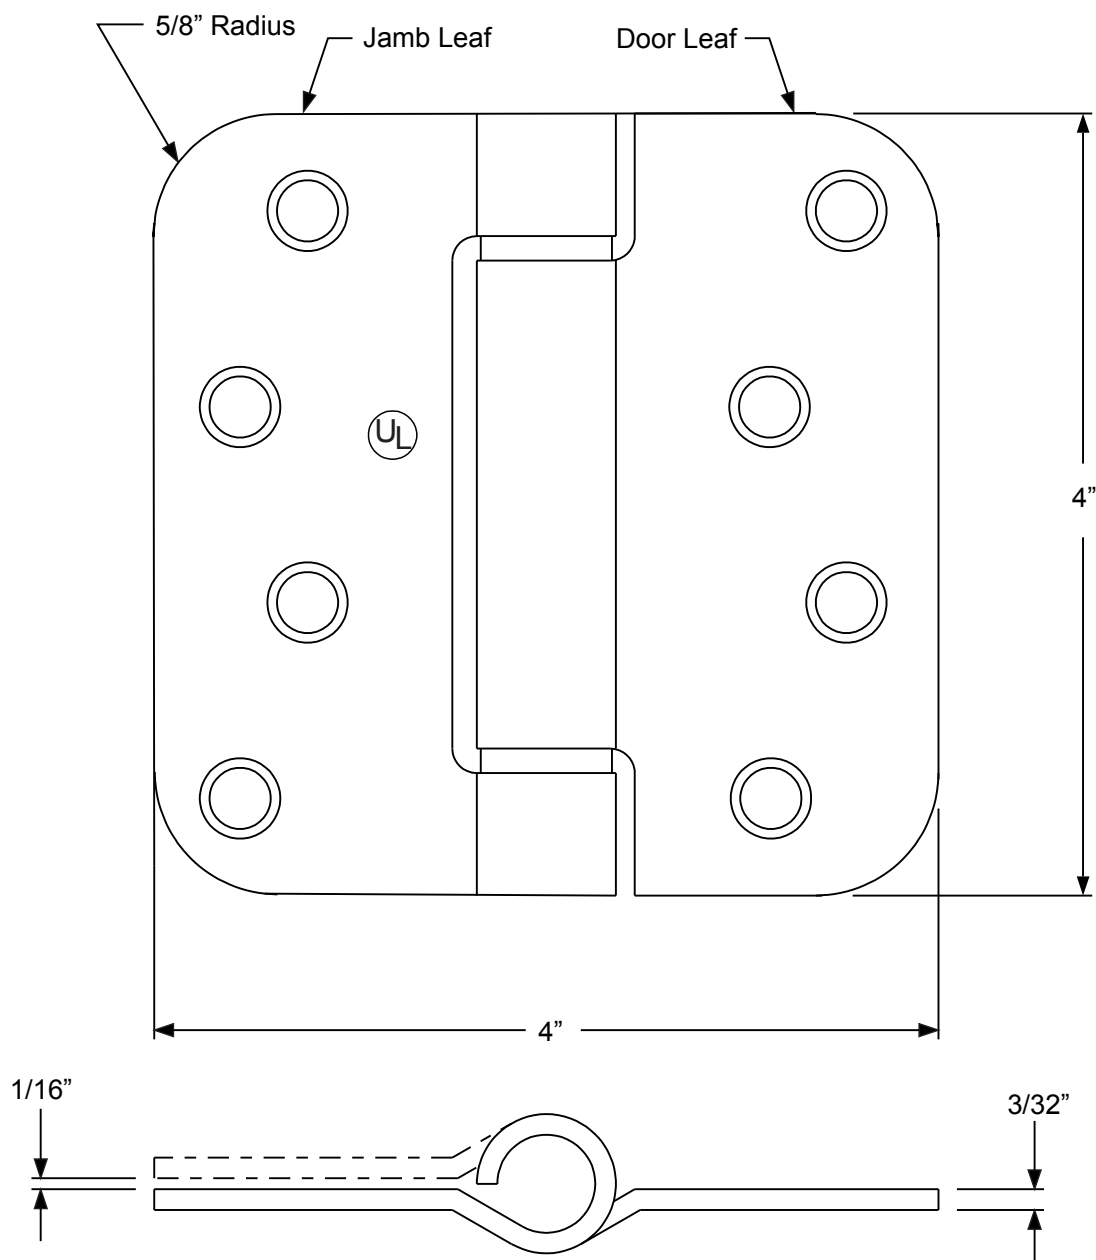


Hardware

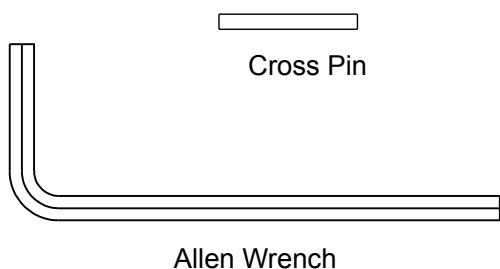


ANSI Standard Template Pattern UL Listed Spring Hinge - Steel Edge Door

THERMA TRU®
DOORS

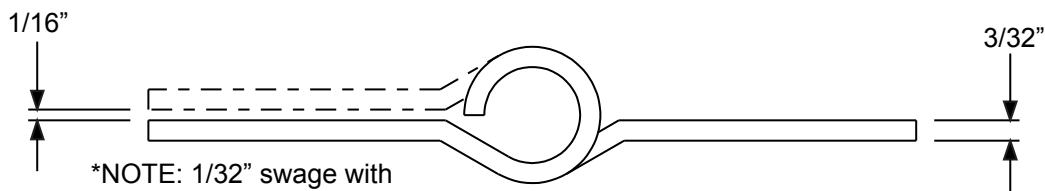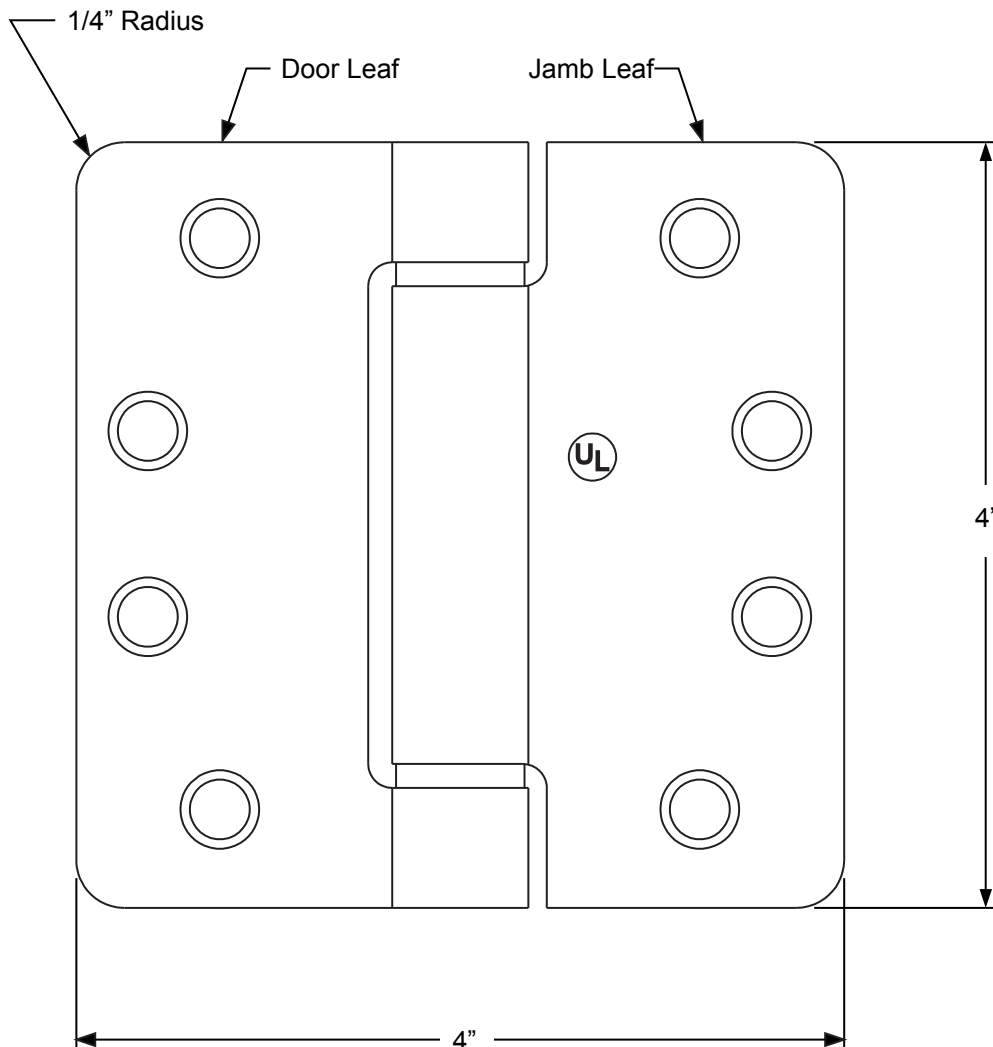


*NOTE: 1/32" swage with
5/8" corner radius recommended
when using a Steel Edge door
with a wood frame.

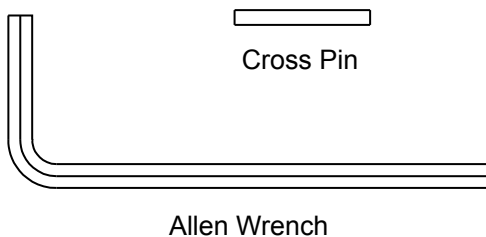


Allen Wrench





Cross Pin



Jamb Leaf
#10 x 3/4" Phillips
Flat Head Screw




#12-24 x 1/2"
with #10 Head
Machine Screw

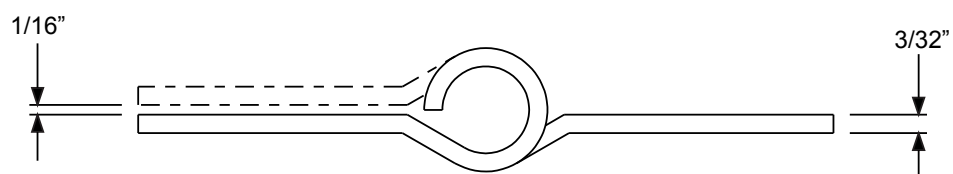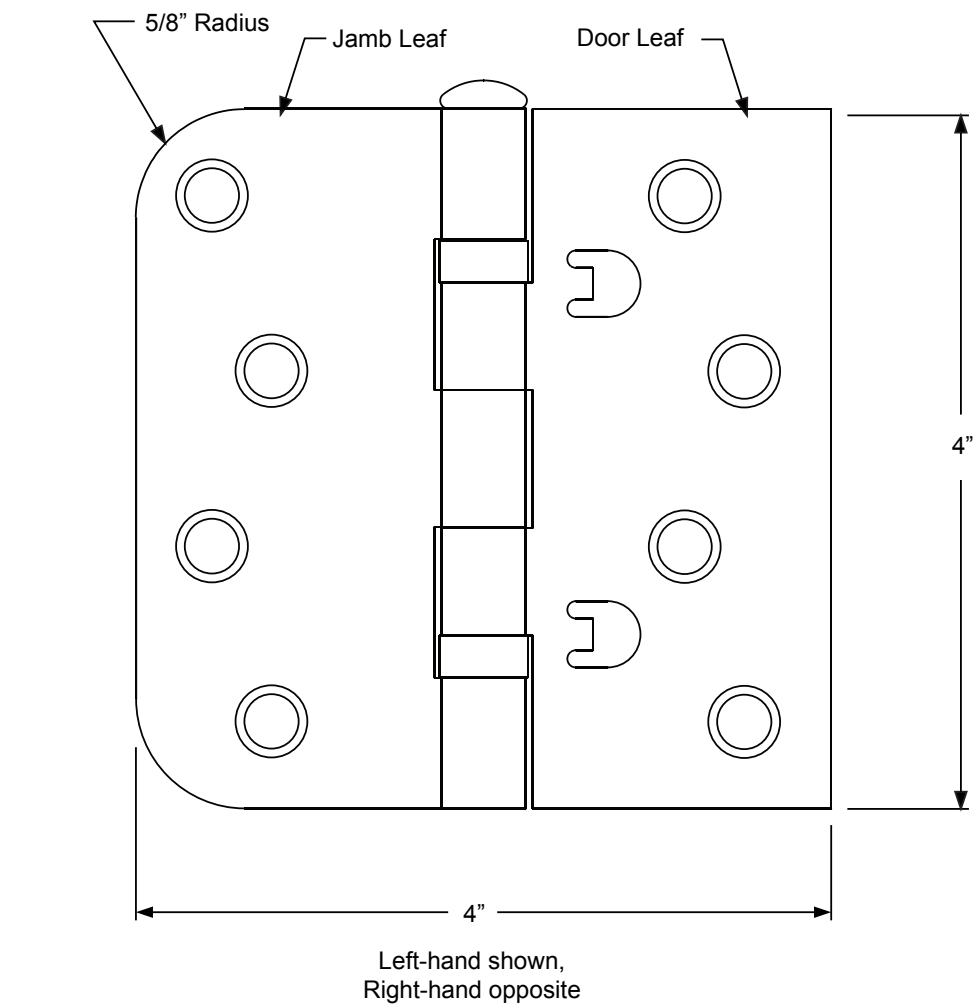



Hardware


Self Aligning NRP (Riveted) Pin Hinge

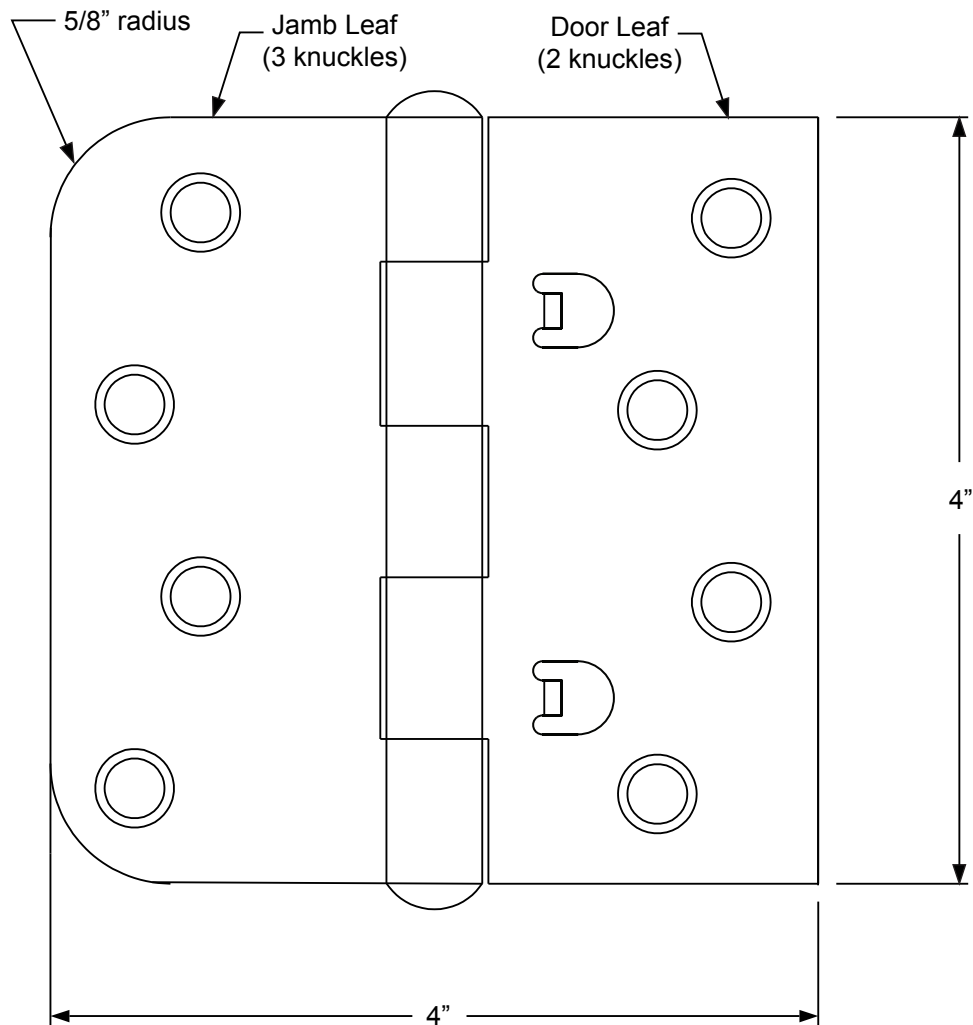


Hardware

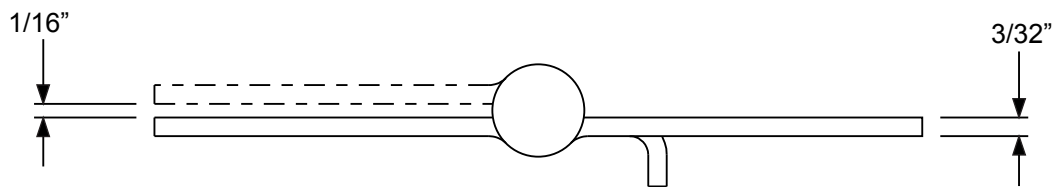



Jamb
#10 x 3/4" Phillips
Flat Head Screw



Wood Edge Door
#10 x 1" Phillips
Flat Head Screw

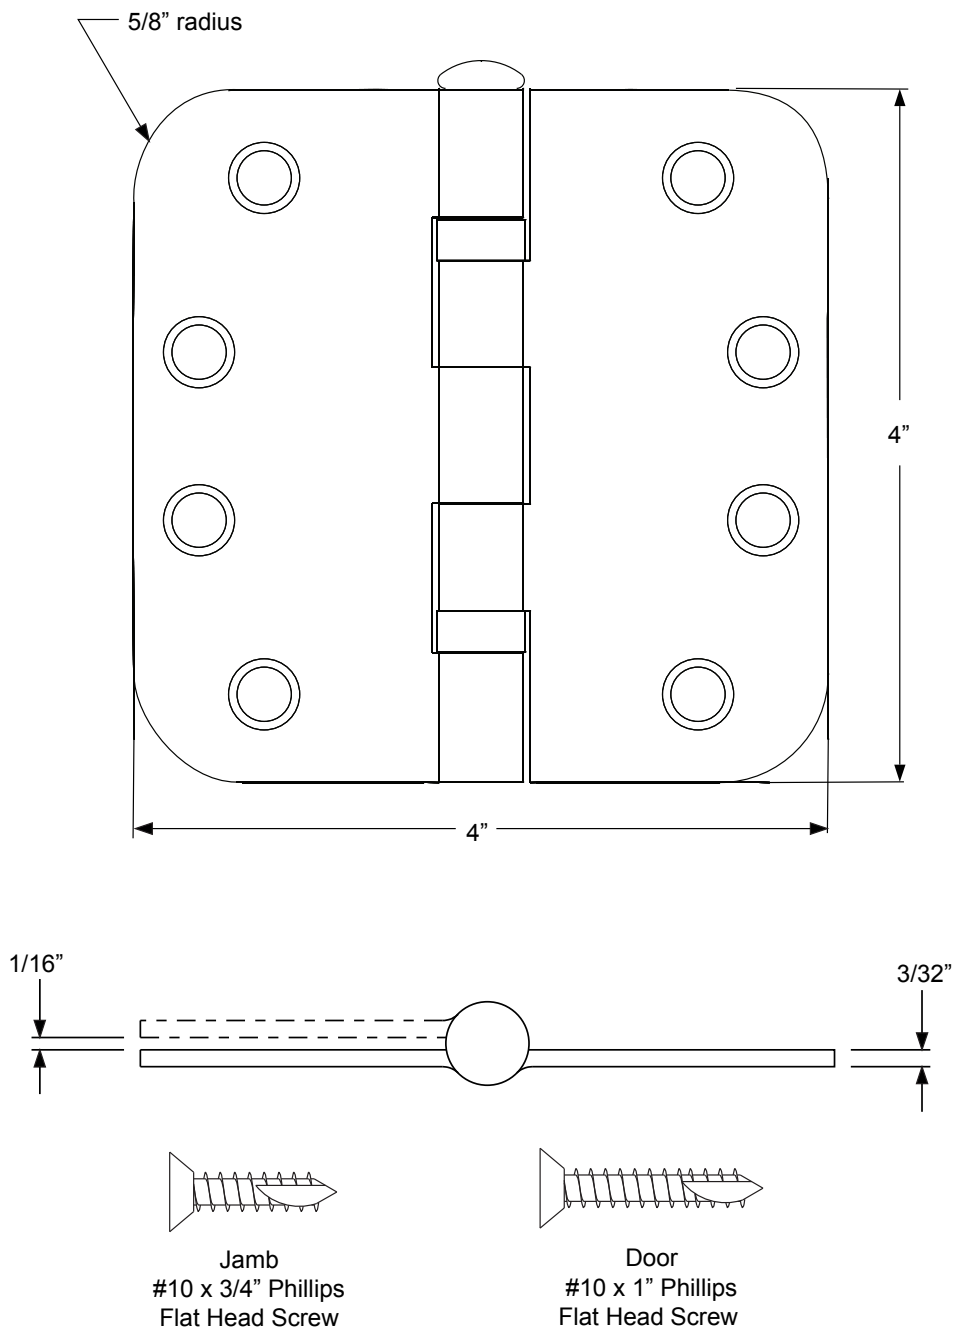


Hardware

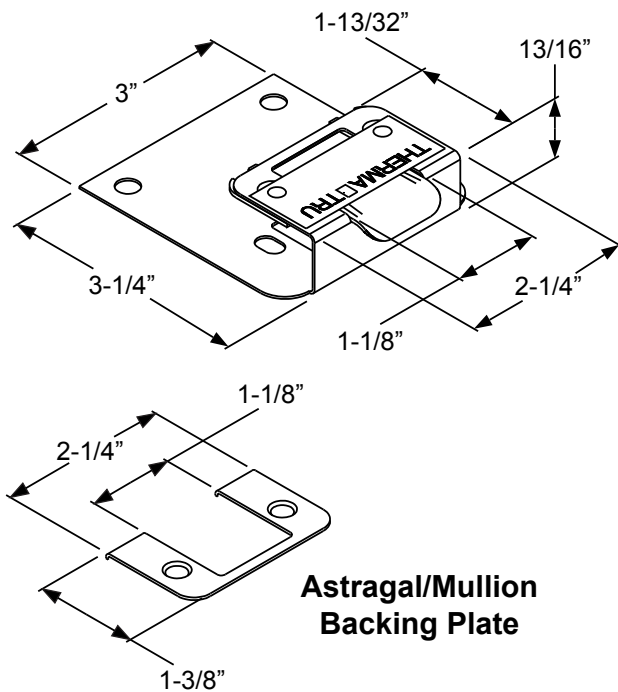

2-1/8" Rabbet Adjustable Security Strike Assembly
(Supplied with backing label, backing plate, & strike plate)

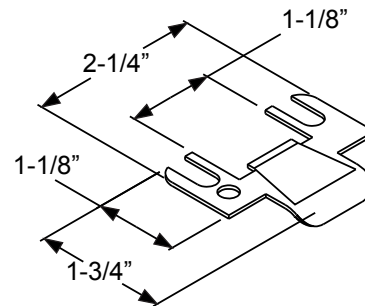

Adjustable Strike Plate
(supplied with backing plates)




Security Strike Screw
#8 x 2-1/2" Phillips
Flathead Screw
(Purchased Separately)




Jamb
#10 x 3/4" Phillips
Flat Head Screw



Astragal/Mullion
#8 x 1-1/2" Phillips
Flathead Screw
(Supplied with Astragal/Mullion
backing plate)








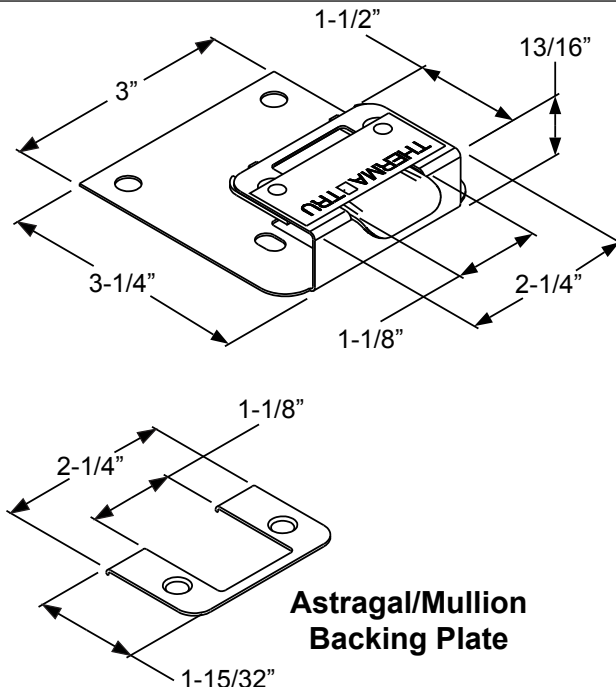


2-3/16" Rabbet Adjustable Security Strike Assembly
(Supplied with backing label, backing plate, & strike plate)

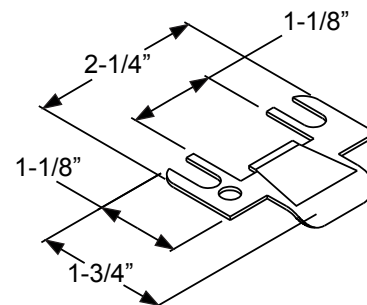

Adjustable Strike Plate
(Supplied with backing plates)


Hardware

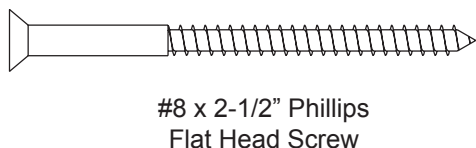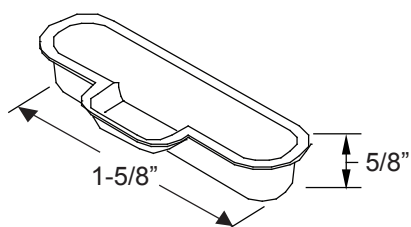
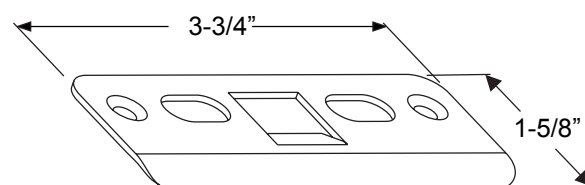
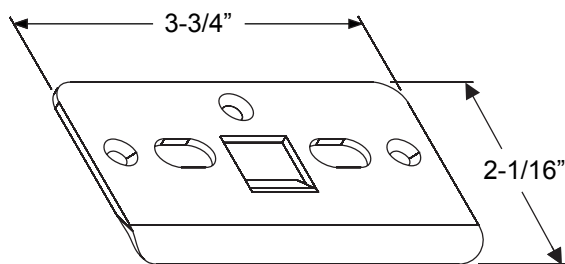
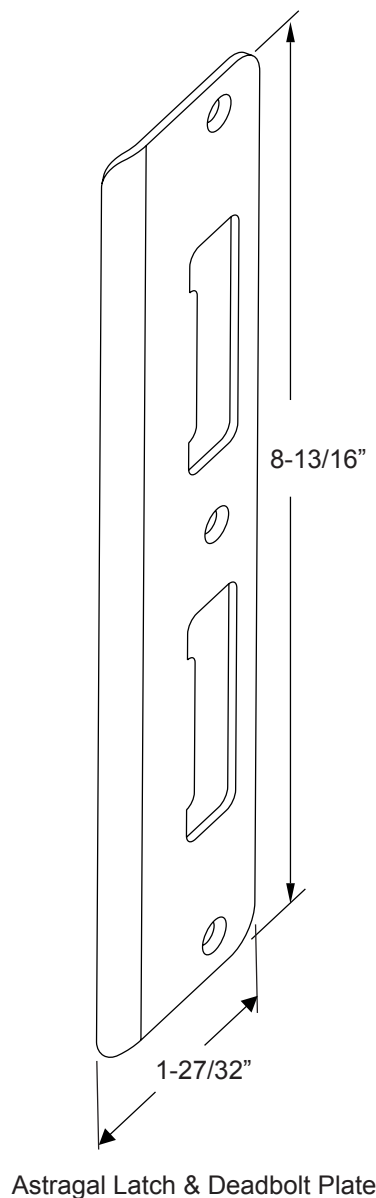


Hardware


French Outswing Multi-Point Lock Shootbolt System Strike Plates

THERMA TRU®
DOORS

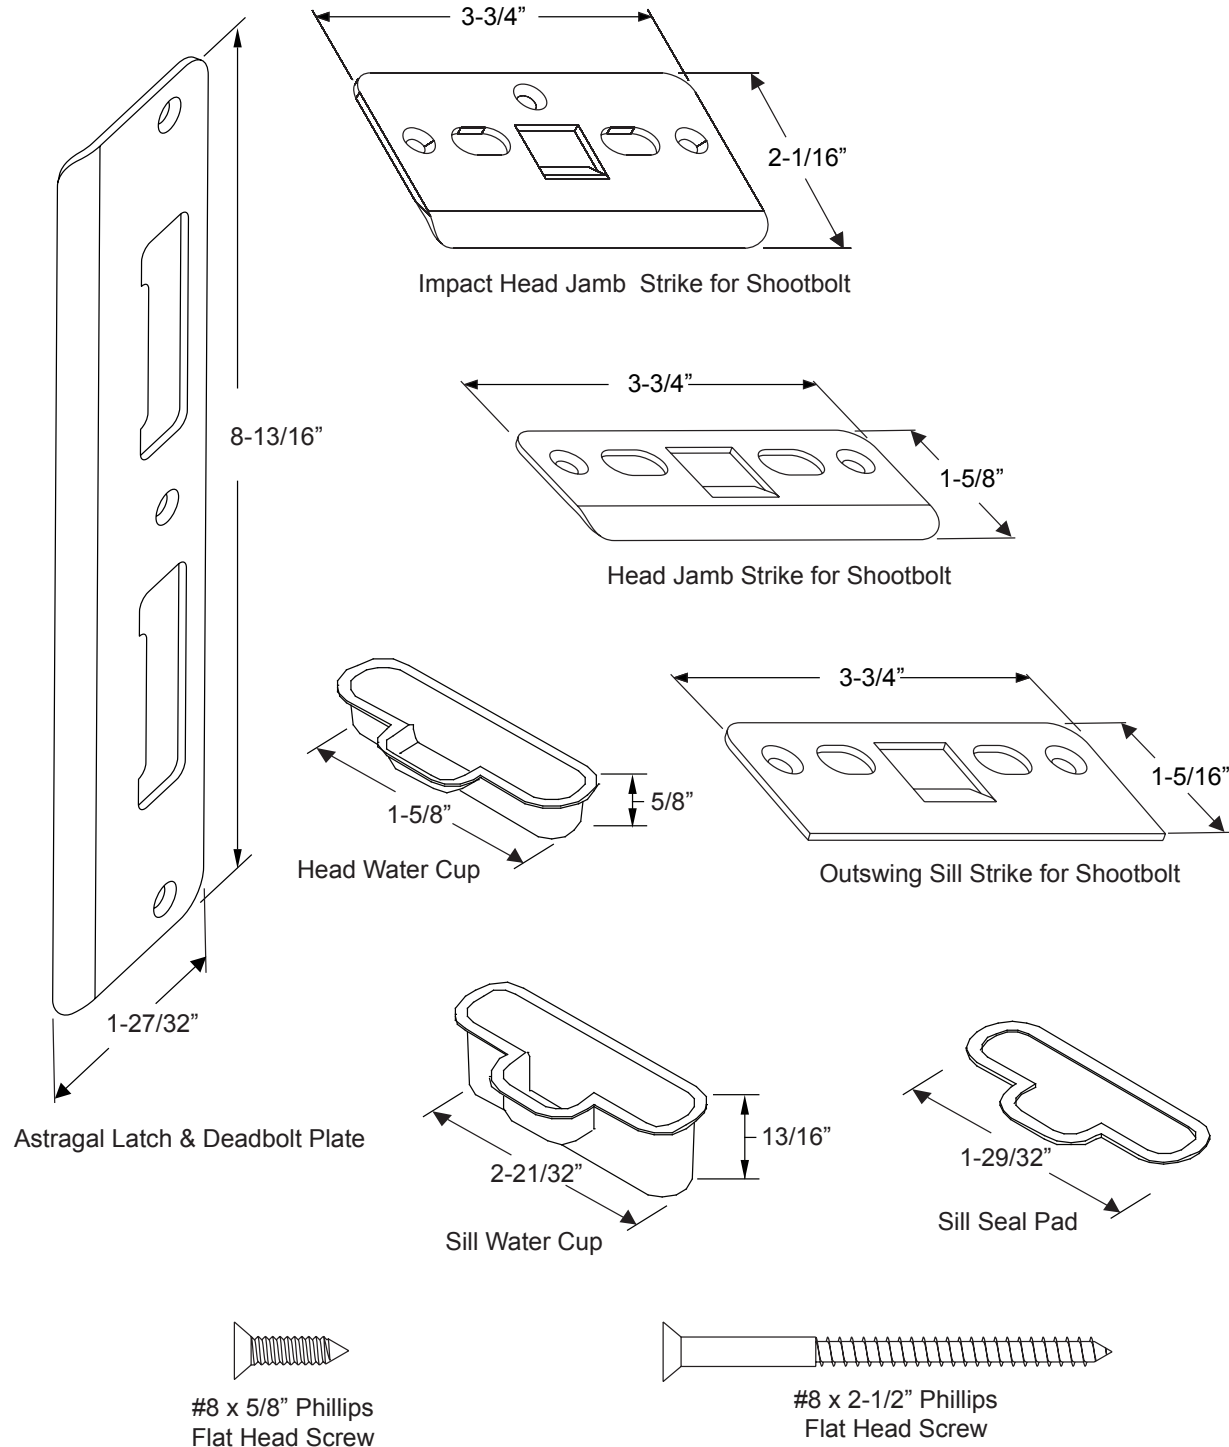

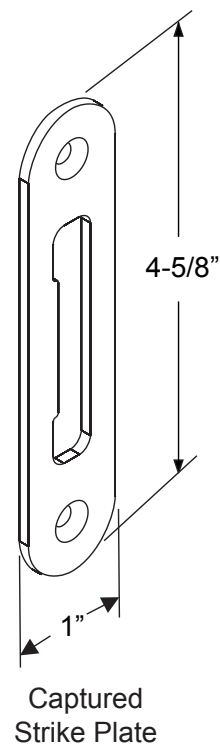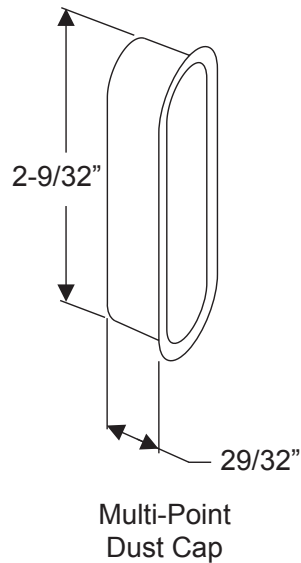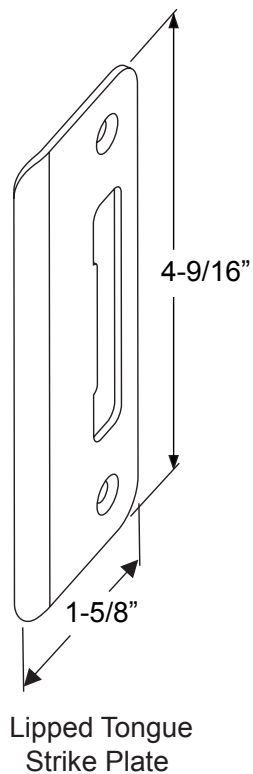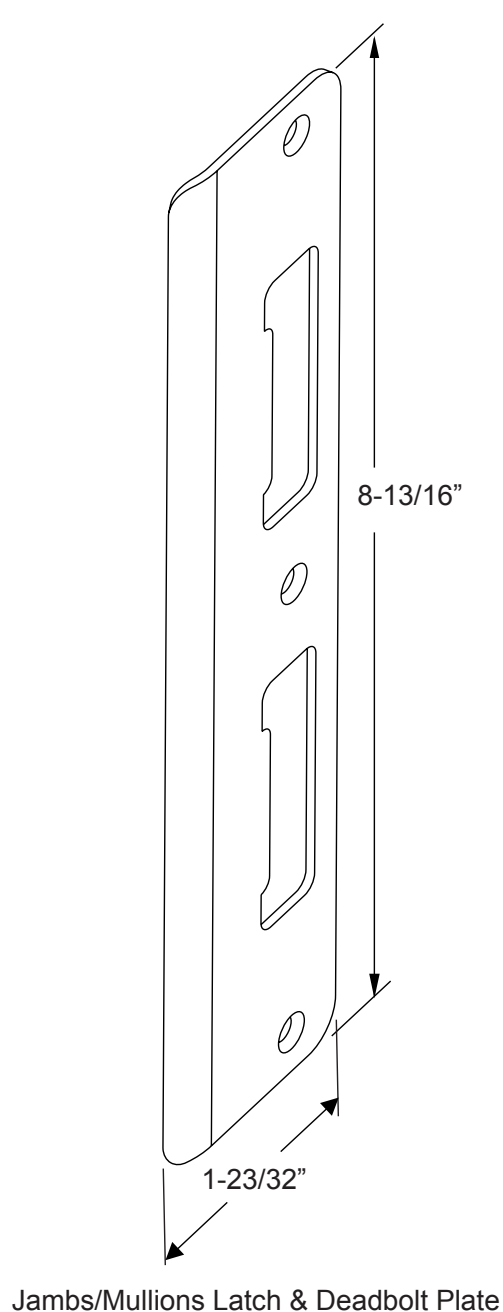

#8 x 5/8" Phillips
Flat Head Screw





#8 x 2-1/2" Phillips
Flat Head Screw

Hardware

Grip Style Multi-Point Lock Tongue System Strike Plates

THERMA TRU
DOORS

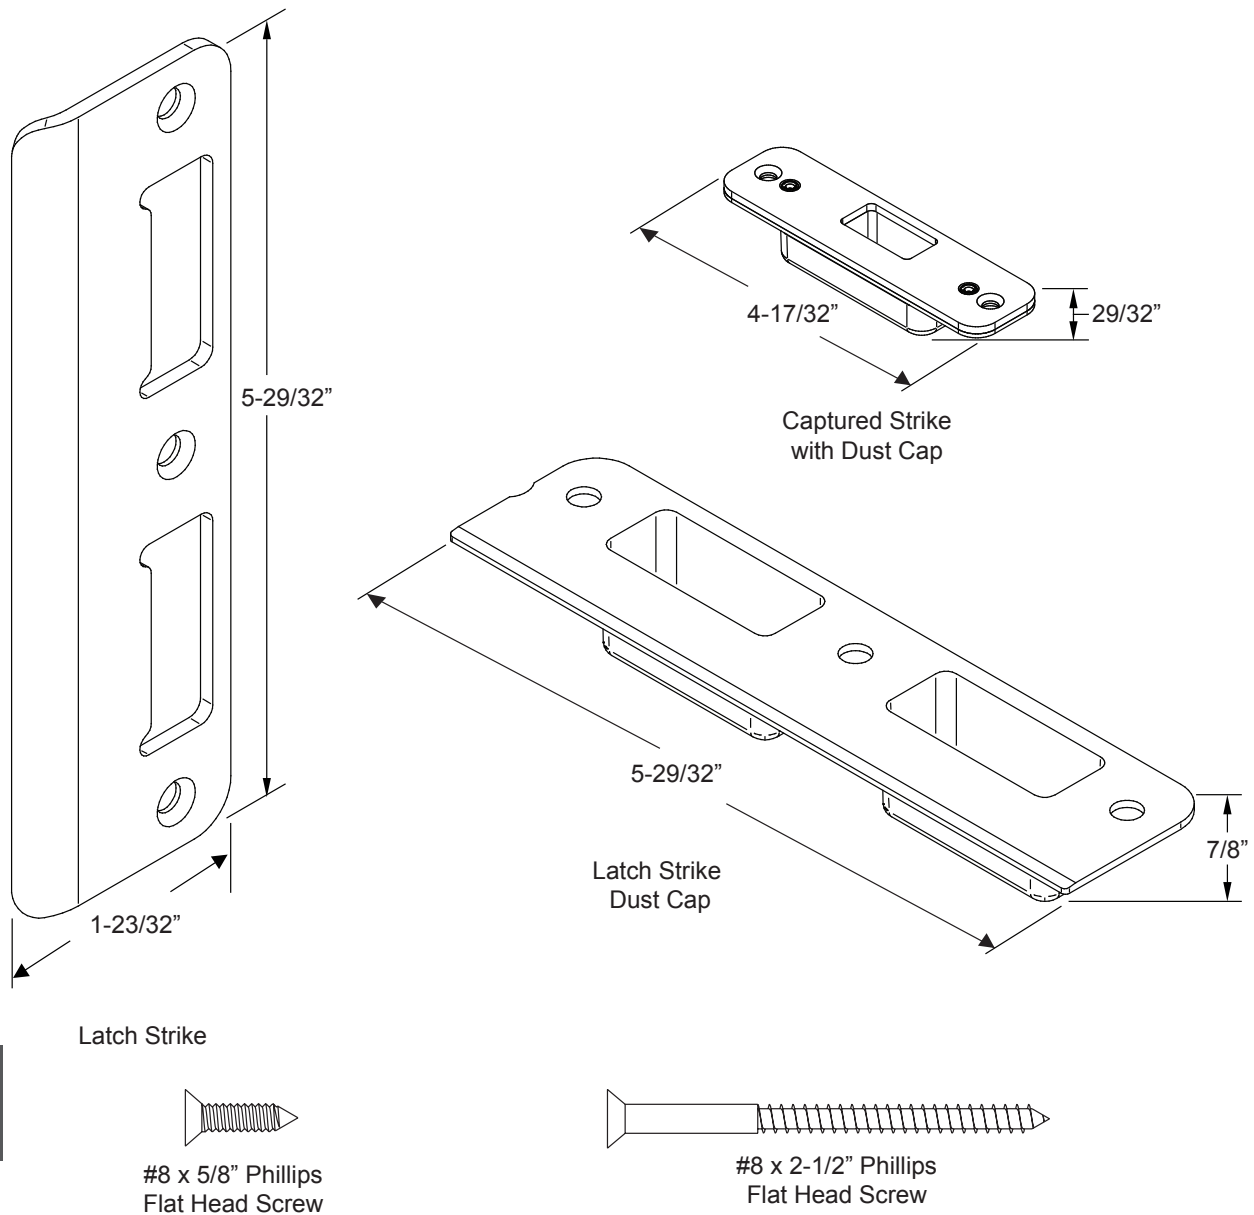

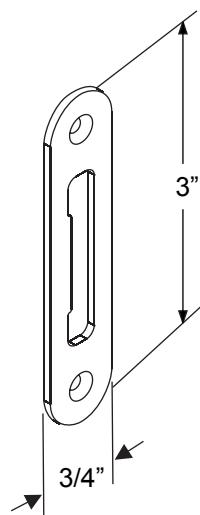

Vented Sidelite
Strike Plate





#8 x 1-1/4" Phillips
Flat Head Screw


Lever Style
Manual Shootbolt System
(Fixed Height)

Door Height	Inswing Handle Height	Inswing Overall Height
6/6	33-1/2"	76-25/32"
6/8	36-1/16"	79-5/32"
7/0	36-1/16"	83-5/32"
8/0	36-1/16"	95-5/32"

Door Height	Outswing Handle Height	Outswing Overall Height
6/6	33-7/16"	76-23/32"
6/8	36"	79-3/32"
7/0	36"	83-3/32"
8/0	36"	95-3/32"

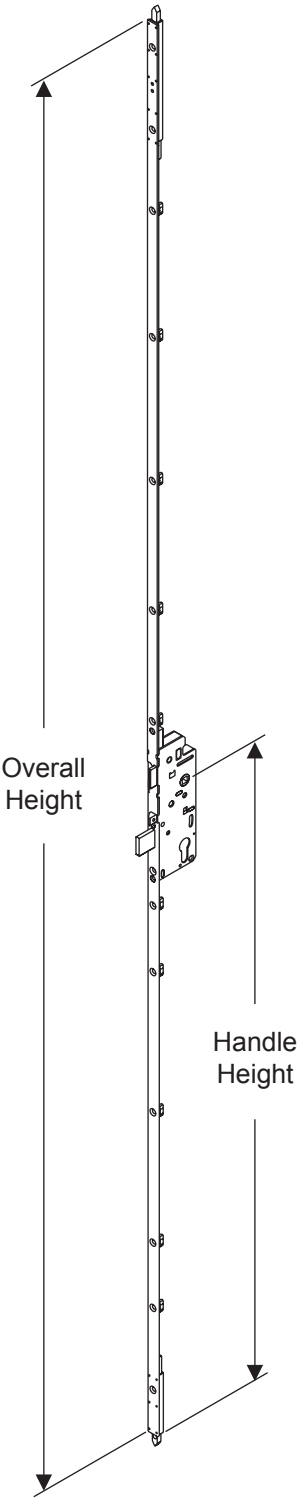


Stainless Steel
Mounting Screw

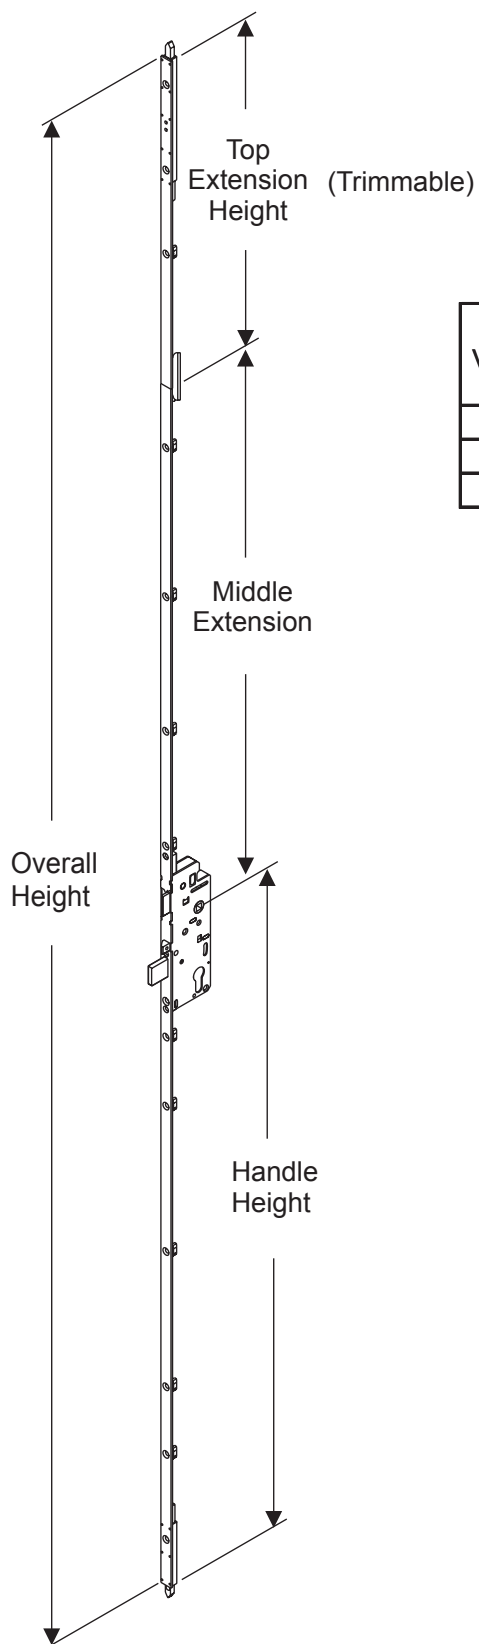

Lever Style Manual Shootbolt System (Variable Height)

Variable Door Height	Handle Height	Maximum Trim
76-5/8" to 80-9/16"	36"	3.94"
82-1/2" to 86-15/32"	36"	3.94"
88-7/16" to 95-5/16"	36"	3.94"


Hardware




Stainless Steel
Mounting Screw

Lever Style
Manual Tongue System


Door Height	Inswing & Outswing Handle Height	Inswing & Outswing Overall Height
6/6	33-7/16"	76-25/32"
6/8	36"	79-1/8"
7/0	36"	83-5/32"
8/0	36"	95-5/32"

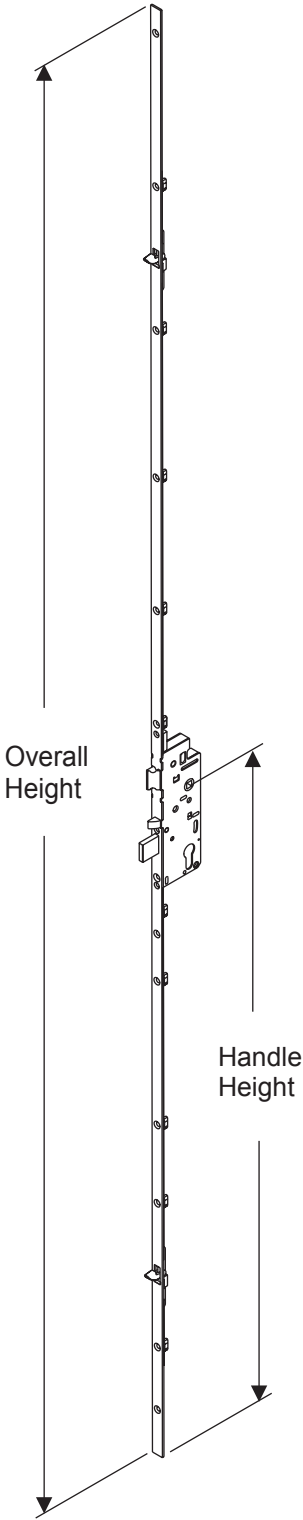

Hardware




Stainless Steel
Mounting Screw

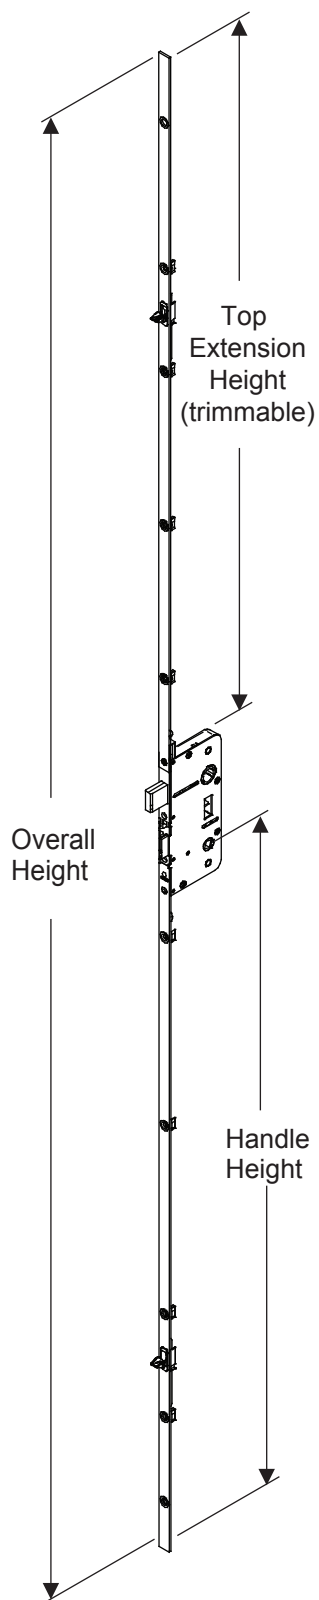

Grip Style MPLS System (Variable Height)

VARIABLE DOOR HEIGHT	OVERALL HEIGHT	HANDLE HEIGHT
76-5/8" to 80-9/16"	79.043	36.000
82-1/2" to 86-15/32"	83.059	
88-7/16" to 95-5/16"	95.067	


Hardware



Stainless Steel
Mounting Screw


Vented Sidelite Tongue System

Door Height	Inswing Handle Height	Inswing Overall Height
6/6	33-7/16"	63"
6/8	36"	63"
8/0	36"	63"

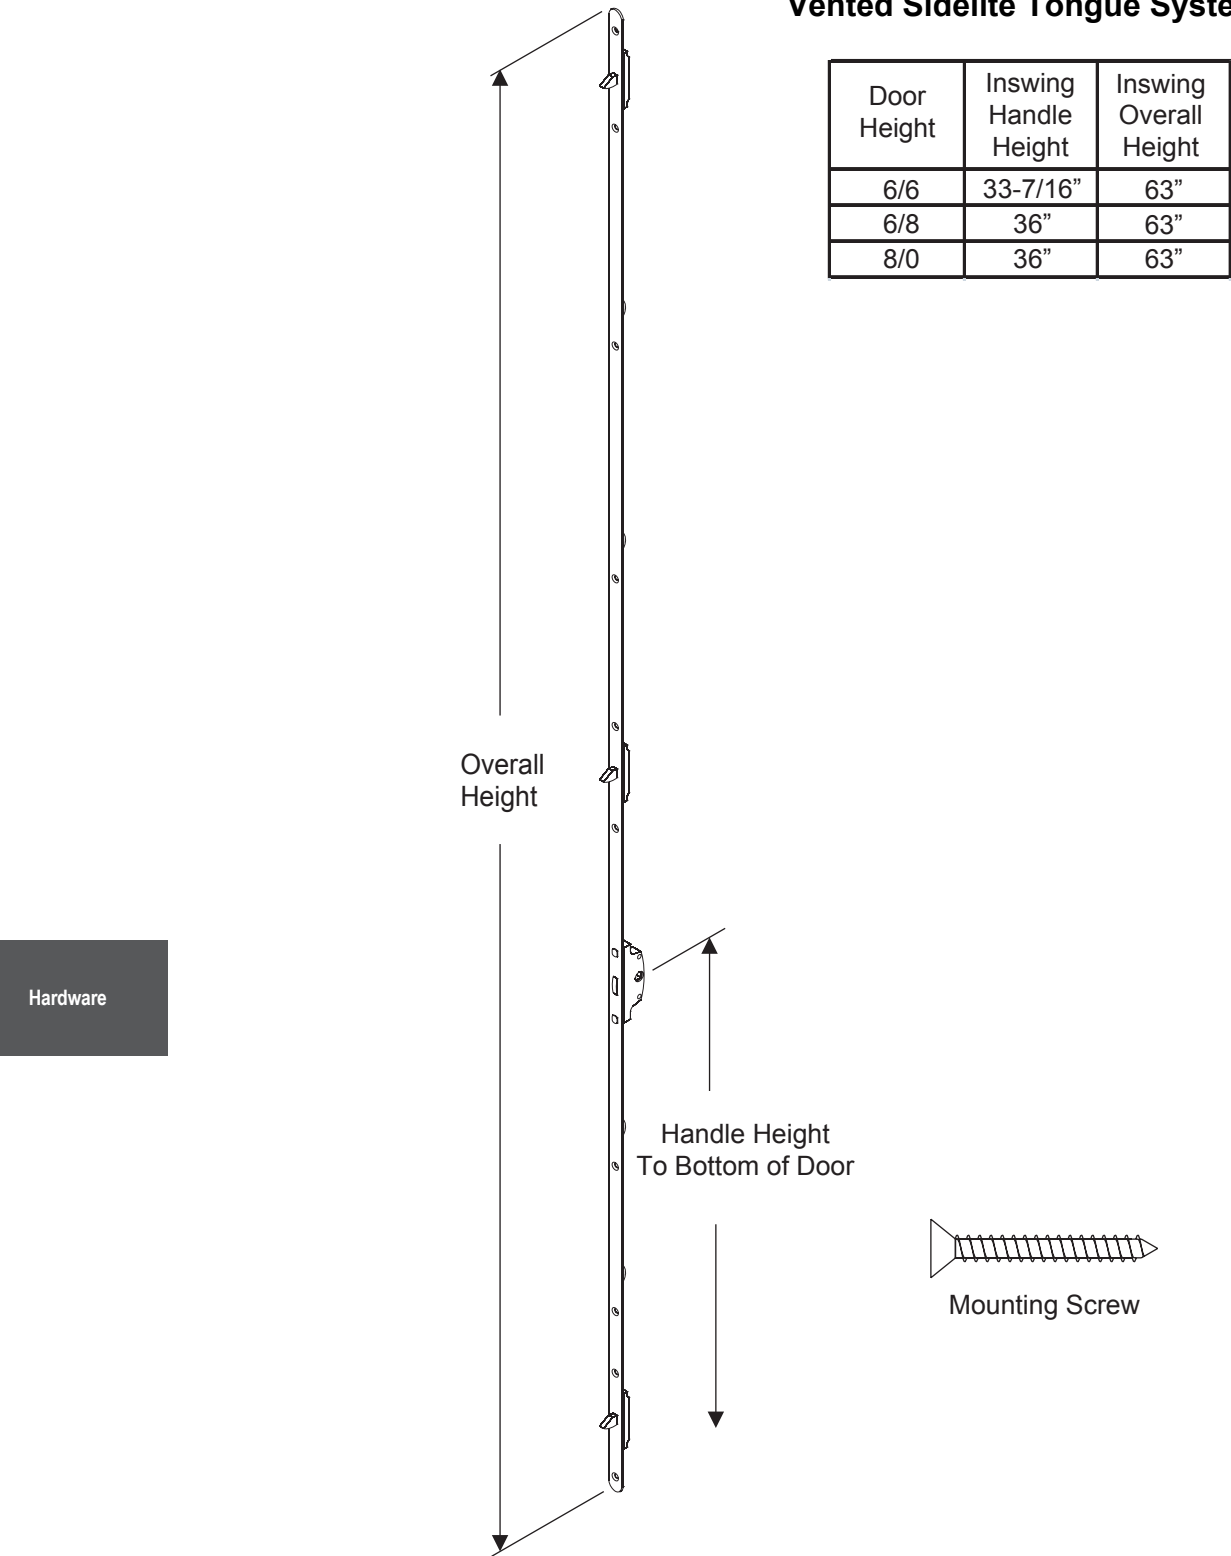


Active

available in both 45mm & 60mm backset

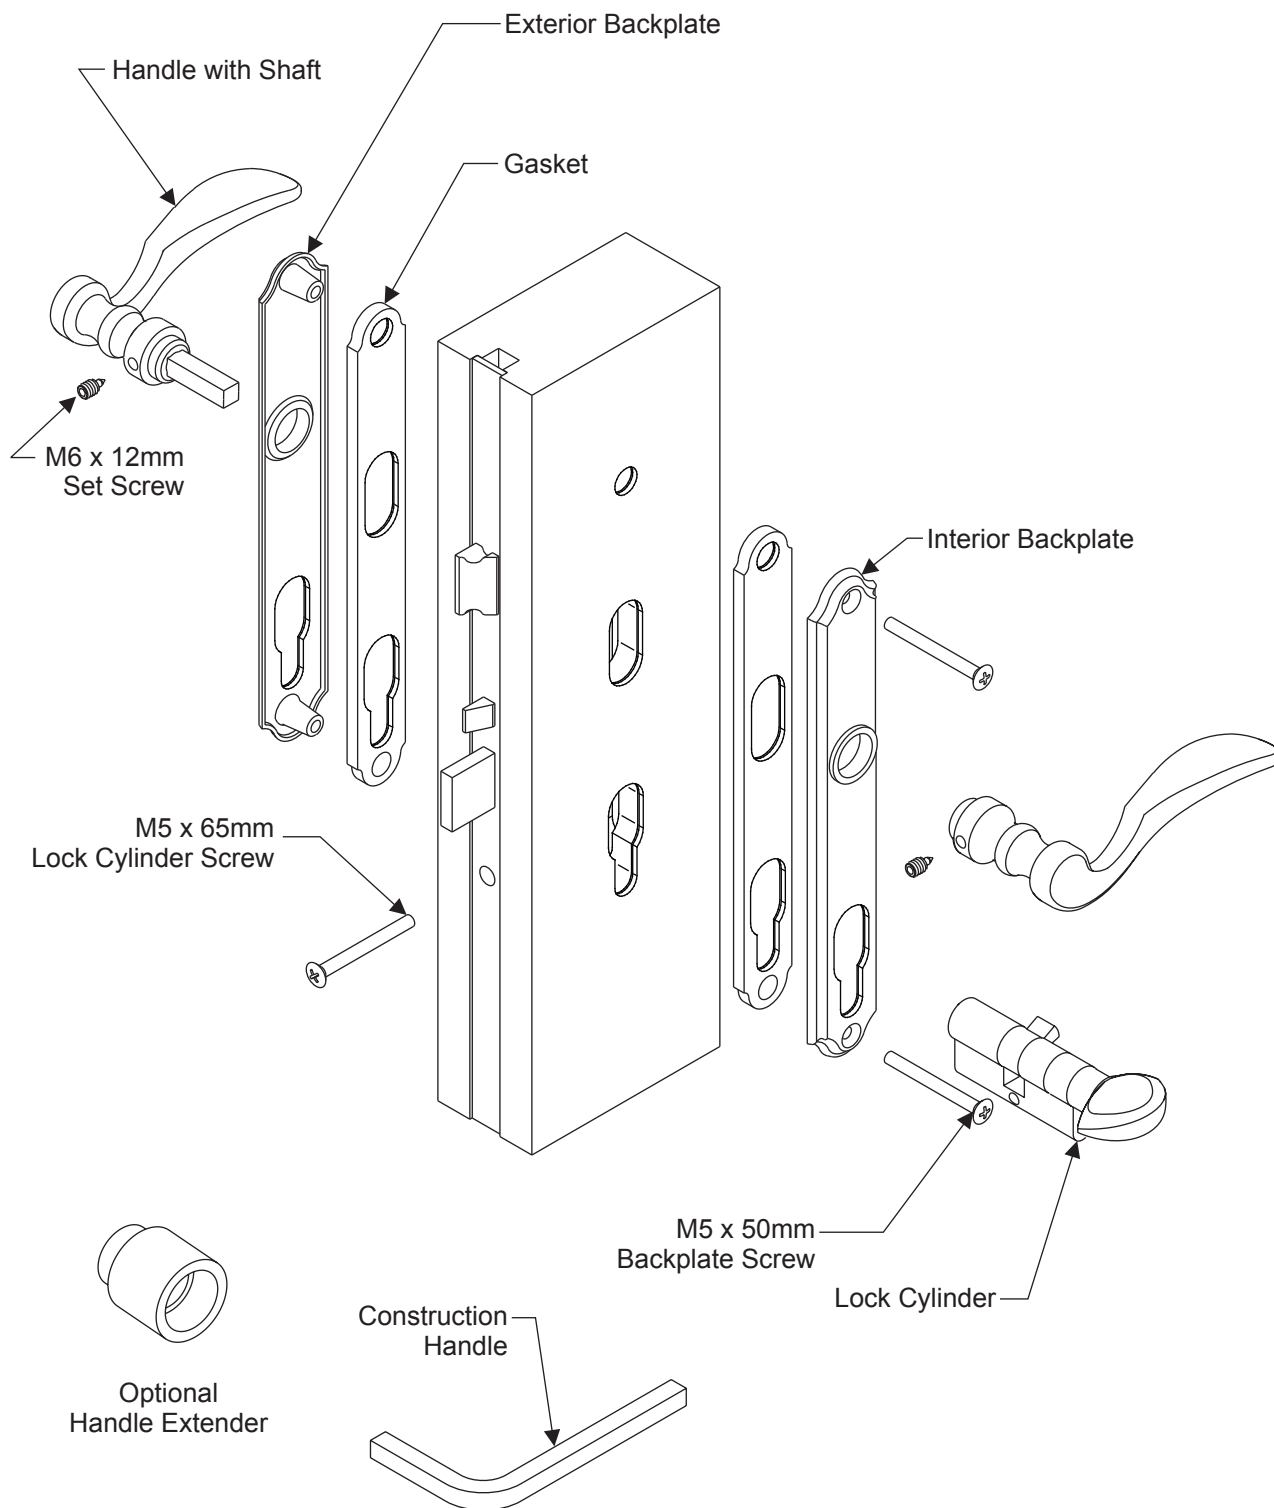


Hardware

Inactive

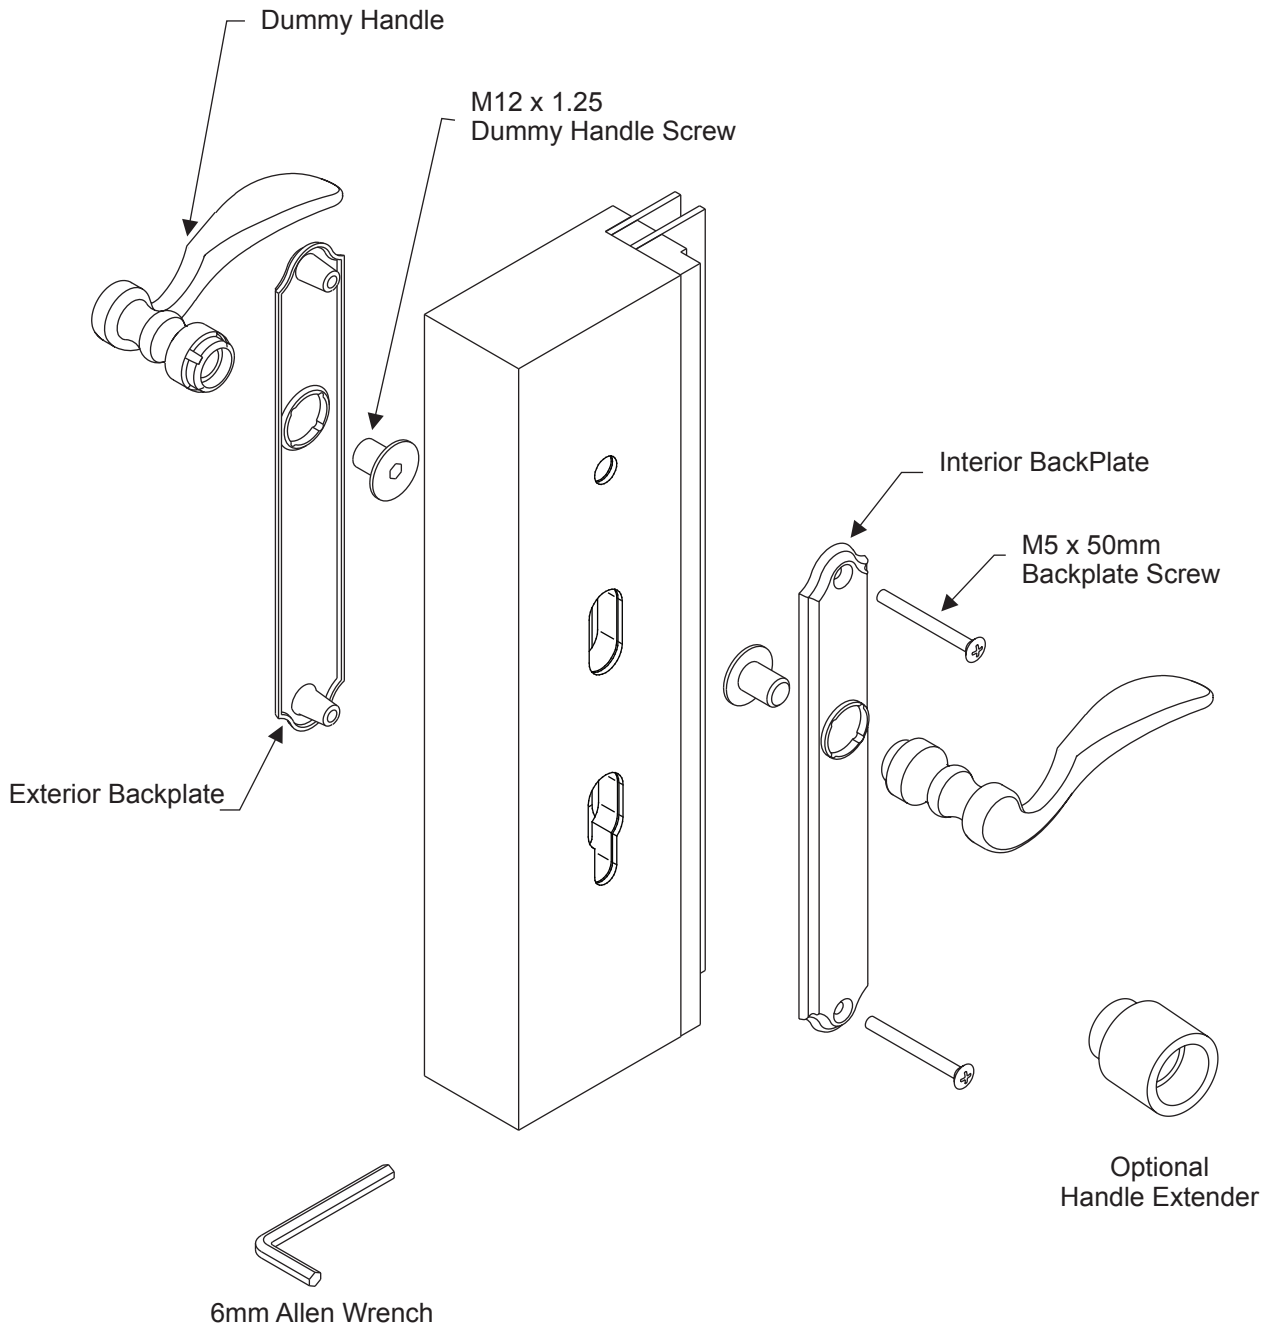



Hardware

Active
60mm backset

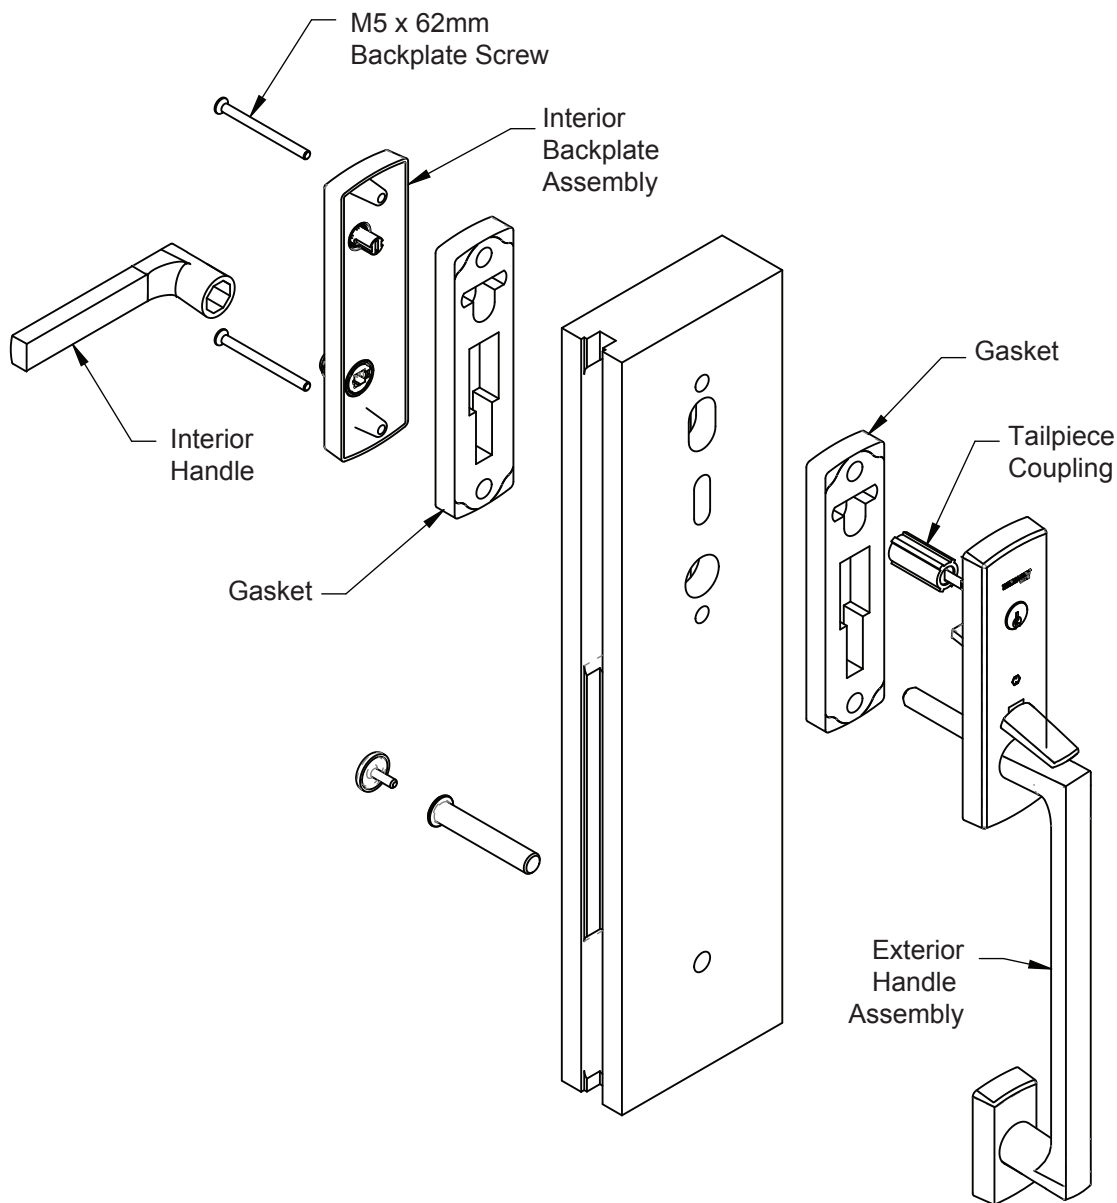


Hardware



Vented Sidelite

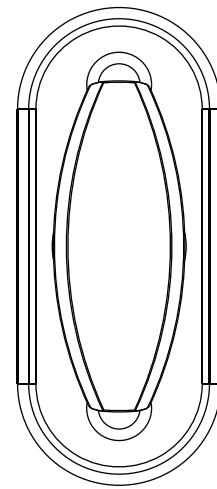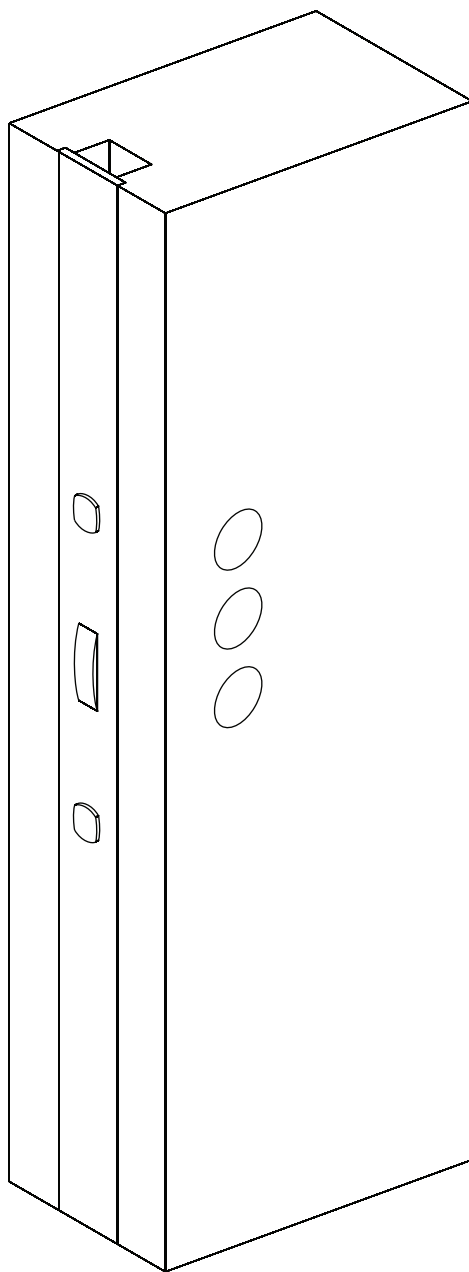

Thumb Turn





Thumb Turn




M5 x 35mm
Handle Screw


Hardware

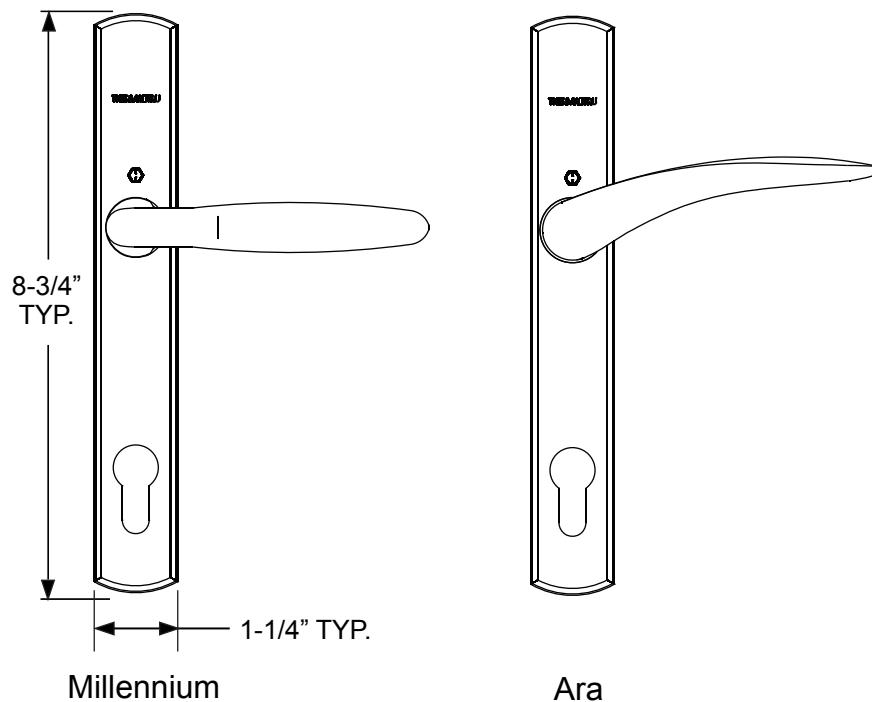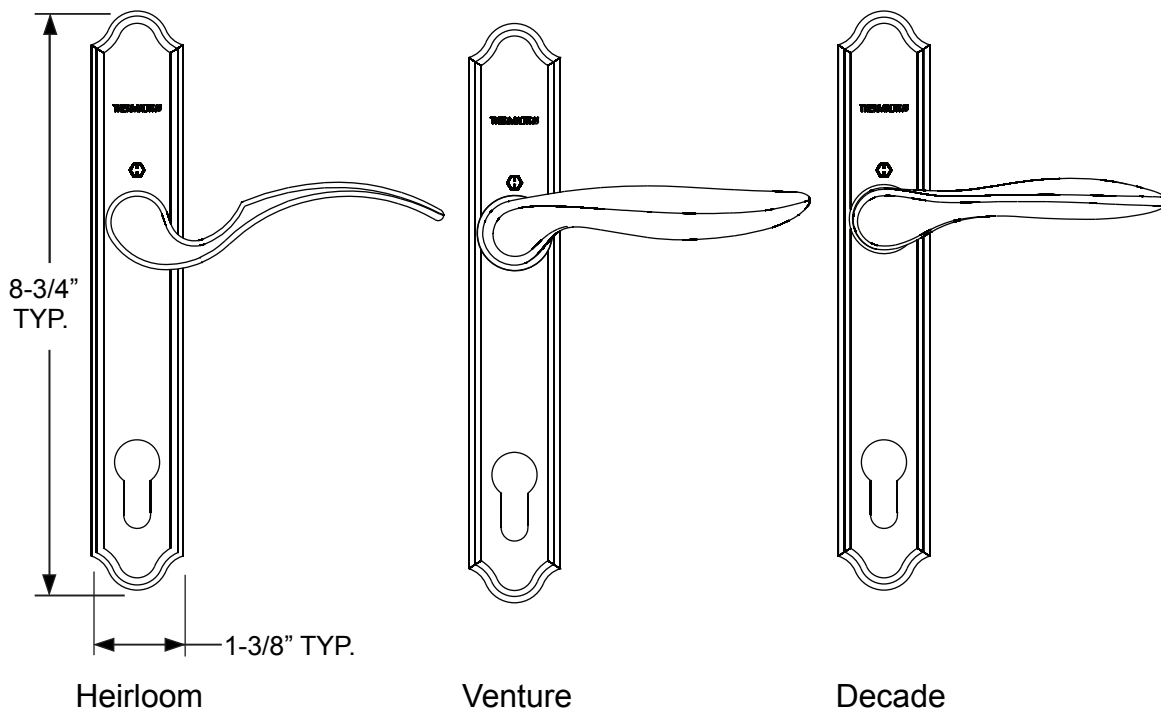


Hardware

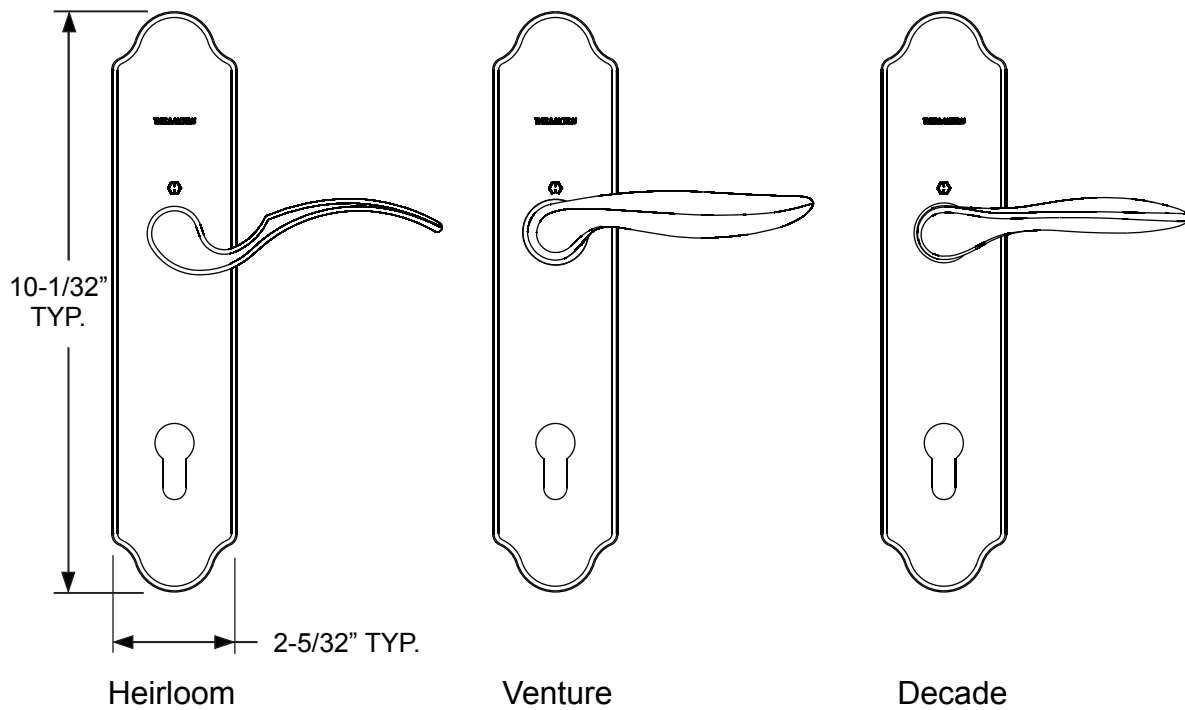


Hardware

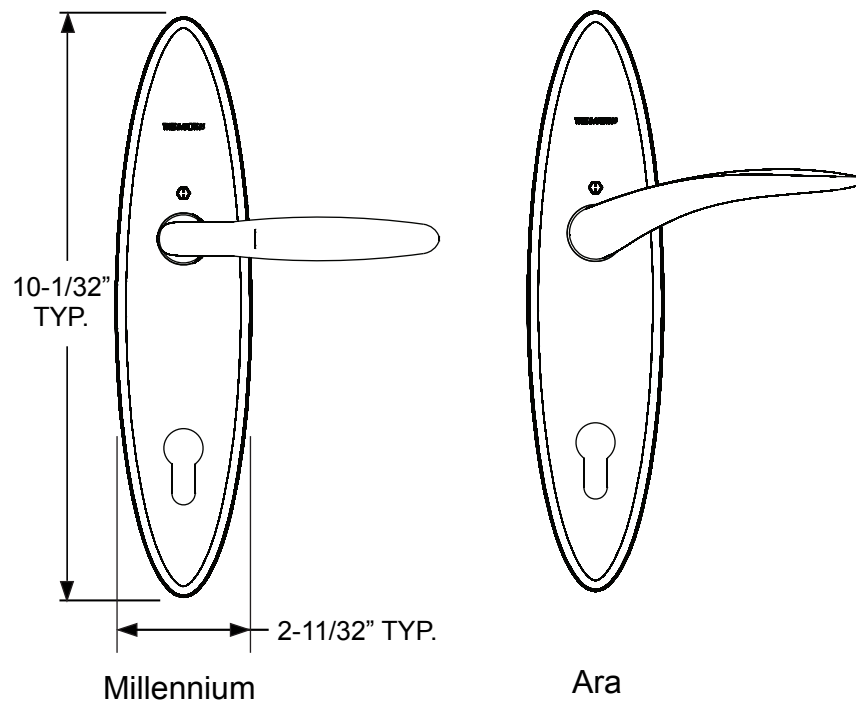


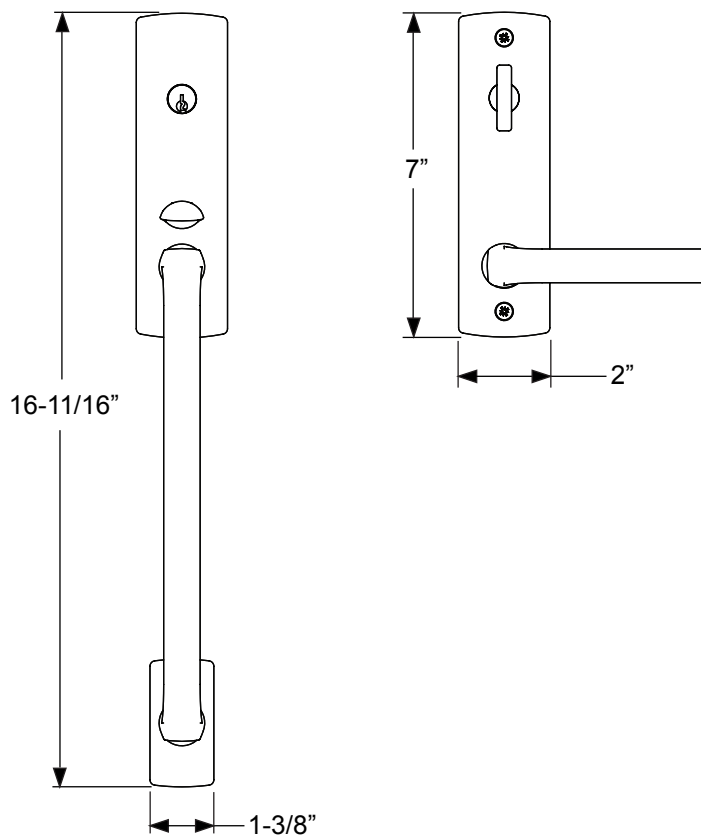


Forte

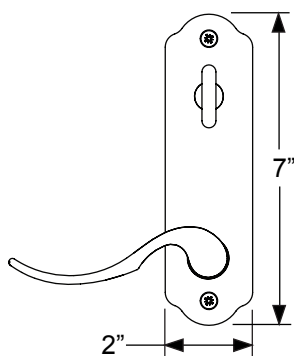

Right Hand Door

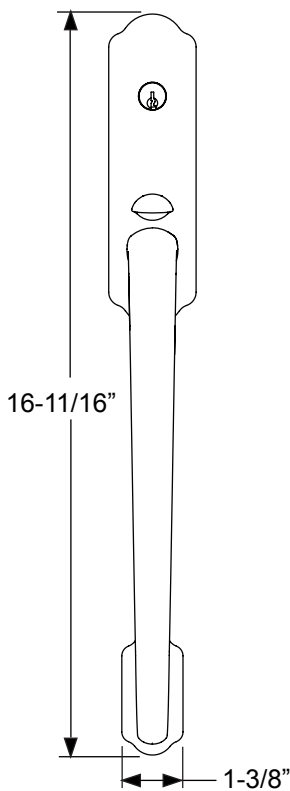


Prospect

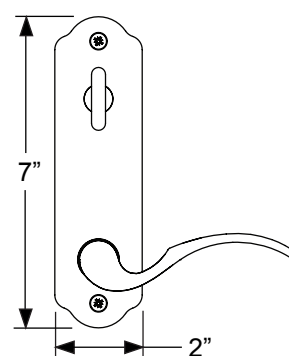


Left Hand Door

Hardware


Round Clavos




Pyramid Clavos



Strap Hinge

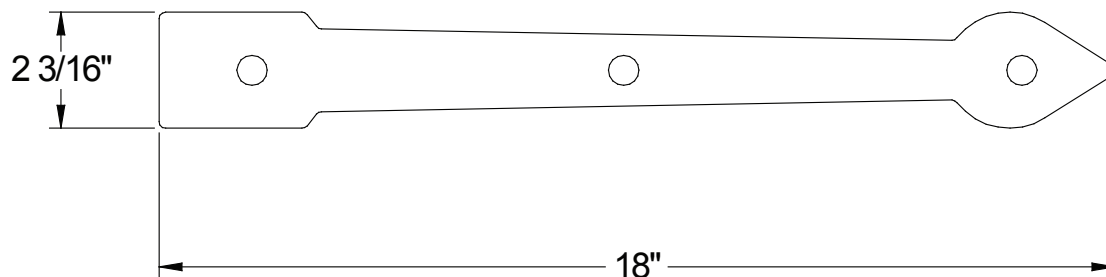


Hardware

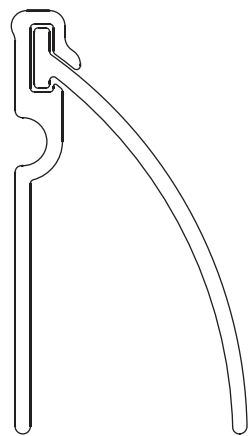

AS ASSEMBLED

DOOR WIDTH	LENGTH
2/4	26.563
2/6	28.563
2/8	30.563
2/10	32.563
3/0	34.563

Rain Guard (Outswing)

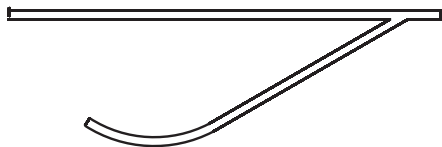

Size	Length
2/4	28.000"
2/6	30.000"
2/8	32.000"
2/10	34.000"
3/0	36.000"
3/6	42.000"

Hardware