

# R W Building Consultants, Inc.

Consulting and Engineering Services for the Building Industry

P.O. Box 230 Valrico, FL 33595 Phone 813.659.9197 Facsimile 813.754.9989

Florida Board of Professional Engineers Certificate of Authorization No. 9813

## Product Evaluation Report


Report No.: FL 7640.4  
Date: November 9, 2006  
Product Category: Doors  
Product sub-category: Swinging Exterior Door Assemblies  
Product Name: "Smooth Star", "Fiber Classic", "Classic Craft" & "Classic Craft Rustic"  
Glazed Fiberglass Double Door Outswing  
"Impact"  
Manufacturer: THERMA-TRU CORPORATION  
118 Industrial Drive  
Edgerton, OH 43517  
Phone - 419-298-1740

Scope: This is a Product Evaluation report issued by R W Building Consultants, Inc. and Wendell W. Haney, P.E. (System ID # 1993) for Therma-Tru Corporation based on Rule Chapter No. 9B-72.070, Method 1d of the State of Florida Product Approval, Department of Community Affairs-Florida Building Commission.

RW Building Consultants and Wendell W. Haney, P.E. do not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the Florida Building Code (2004 Edition).

See Drawing No.: FL 3013 prepared by R W Building Consultants, Inc. and signed and sealed by Wendell W. Haney, P.E. (PE # 54158) for specific use parameters.




Wendell W. Haney, P.E.  
PE # 54158  
November 9, 2006

## Limitations

1. The “Smooth Star”, “Fiber Classic”, “Classic Craft” & “Classic Craft Rustic” Glazed Fiberglass Double Door Outswing “Impact” has been evaluated and meets the requirements for use within the State of Florida excluding the “High Velocity Hurricane Zone”.
2. When used in areas outside the “HVHZ” requiring wind-borne debris protection this product complies with Section 1609.14 of the Florida Building Code as an impact resistant product and does not require an impact resistant covering. This product meets missile level “D” and includes wind zone 4 as defined in ASTM E1996.
3. Size Limitations:

<u>Configurations</u>	<u>MAX. Width</u>	<u>MAX. Height</u>
Double      XX	74.50”	82.00”

4. See Drawing #FL 3013 for Design Pressure Ratings.

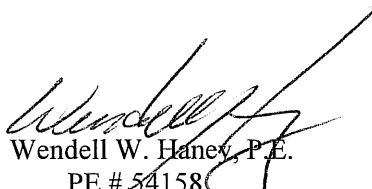  
Wendell W. Haney, P.E.  
PE # 54158  
November 9, 2006

# Supporting Documents

## A Drawing

1. Drawing No. FL- titled "Smooth Star", "Fiber Classic", "Classic Craft" & "Classic Craft Rustic" Glazed Fiberglass Double Door, Outswing, "Impact", prepared by R W Building Consultants, Inc. (Florida Board of Professional Engineers Certificate of Authorization No. 9813), signed and sealed by Wendell W. Haney, P.E.

## B Test


1. Testing per 101/I.S.2/A440-05, ASTM E1886-02 and ASTM E1996-02 as performed by Testing Evaluation Laboratories, Inc. and reported in test report number TEL 06-0718-1, dated July 17, 2006, signed by Wendell W. Haney, P.E.
2. Plastics testing (Solutia Interlayer) in accordance with the "High Velocity Hurricane Zone" substantiated by Issuance of Miami-Dade Notice of Acceptance 03-0421-01, expiring April 14, 2008.

## C Calculations

1. Product anchoring is in accordance with manufacturer's published recommendations as substantiated by tested specimens reported in test report number TEL-06-0718-1.
2. Buck anchor analysis for loading conditions, prepared, signed and sealed by Wendell W. Haney, P.E.
3. Glass Load Resistance Report ASTM E1300-02 prepared by Wendell W. Haney, P.E.

## D Other

Certificate of Participation issued by National Accreditation & Management Institute, Inc., certifying that Therma-Tru Corporation is manufacturing products within a quality assurance program.

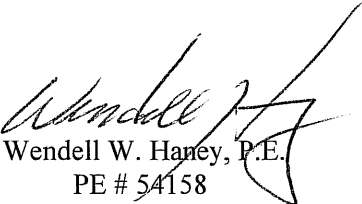

Wendell W. Haney, P.E.  
PE # 54158  
November 9, 2006